

**Sun StorEdge<sup>TM</sup> 3510  
Fibre Channel Array**

**Just the Facts**

**Sun Internal/Partner Version**

**Revision – April 17, 2006**



## Copyrights

©2004 Sun Microsystems, Inc. All Rights Reserved.

Sun, Sun Microsystems, the Sun logo, Sun StorEdge, Sun Fire, Solaris, Solstice, Solstice Backup, Solstice DiskSuite, Netra, Sun Enterprise, Ultra, Sun Blade, Java, SunSpectrum, SunSpectrum Platinum, SunSpectrum Gold, SunSpectrum Silver, SunSpectrum Bronze, and SunSolve are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.

All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the United States and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

UNIX is a registered trademark in the United States and other countries, exclusively licensed through X/Open Company, Ltd.

Netscape is a trademark of Netscape Communications Corporation.

Last update: 04/24/2006



# Table Of Contents

Source	
Materials.....	4
Positioning.....	
5	
Introduction .....	
5	
Key Features.....	
6	
Target Markets .....	
7	
Selling	
Highlights.....	8
Market Value Proposition .....	8
Key Features, Technical Functions, and Benefits .....	8
Support Information and System Requirements .....	9
System Architecture .....	9
Reliability, Availability, and Serviceability (RAS).....	29
Specifications.....	3
1	
System Configuration and Management.....	37
Ordering Information.....	44
Glossary.....	
63	
Materials Abstract.....	66

## Source Materials

*Note: Please read first!*

The latest documentation for the Sun StorEdge 3510 FC array is located at:

[http://www.sun.com/products-n-solutions/hardware/docs/Network\\_Storage\\_Solutions/Workgroup/3510/](http://www.sun.com/products-n-solutions/hardware/docs/Network_Storage_Solutions/Workgroup/3510/)

and

<http://webhome.ebay.com/networkstorage/sales/matrix.html>

There are a number of documents readily available on <http://docs.sun.com> for the Sun StorEdge™ 3510 Fibre Channel array. These documents provide the more detailed information on a number of subjects. The specific URL is:

<http://docs.sun.com/?q=+storeedge+3510>

The content for this URL page includes:

- RAID Firmware 4.15 User's Guide (recommended reading)
- Release notes
- Best Practices Manual
- Configuration Service 2.3 User's Guide
- FRU Installation Guide
- Installation, Operation, and Service Manual
- Diagnostic Report 2.3 User's Guide
- Safety, Regulatory, and Compliance Manual
- Sun StorEdge 3000 Family Rack Installation Guide for 2U Arrays

Additional reference materials and web sites are listed in the Materials Abstract section of this document.

# Positioning



**Figure 1.** The Sun StorEdge™ 3510 Fibre Channel array

## Introduction

Introducing the Sun StorEdge™ 3510 Fibre Channel array, the flagship product of the Sun StorEdge 3000 family. The StorEdge 3510 Fibre Channel array supports high-performance 2-Gb Fibre Channel throughout the architecture (midplane, drives, host/drive ports).

Customers of Sun's server products should find the Sun StorEdge 3510 FC Fibre Channel array an excellent storage complement to complete their IT infrastructure for the entry-level storage market segment. For example, the combination of a Sun Fire X4200 server and a Sun StorEdge 3510 Fibre Channel array can function as a very capable database or run bandwidth-intensive applications, such as video streaming.

Key technical highlights of the Sun StorEdge 3510 Fibre Channel array include:

- Available with a single RAID controller, dual redundant RAID controllers, or as an expansion unit, all in a 2U high (3.5-inch) chassis
- Four 2-Gb FC host ports per RAID controller, resulting in eight host ports in dual RAID controller configurations
- Servers can be directly attached to arrays without requiring external switches
- Up to eight Sun StorEdge 3510 Fibre Channel array storage expansion units can be attached to a single RAID array, for a total raw storage capacity of over 32 TB (using 300-GB drives)
- In-band management through FC host connection or out-of-band management via serial or Ethernet connections
- Menu-driven VT100 terminal interface for efficient configuration control
- CLI for scripting control
- Intuitive, simple setup and management; single management GUI provides intuitive RAID and LUN configuration for every array in the environment
- Support for up to 1024 LUNs private or public loop and 64 LUNs in point to point/full fabric mode (in both single and dual RAID controller configurations)
- Support for Sun SAN 4.4
- Dual redundant, hot-swappable power supplies (AC or DC options)
- Full NEBS level 3 certification and MIL-STD-810F compliance for air, land, and marine deployment



## Key Features

The initial release of the Sun StorEdge 3510 Fibre Channel array includes the following features.

Feature	Specifications
Host Interface	2-Gb Fibre Channel
Number of Host Interfaces	Single controller: four FC ports for host connectivity Dual controller: eight FC ports for host connectivity Expansion: two FC ports for disk connectivity
Number of Drives	Per controller tray: 12 hot-swappable Per expansion tray: 12 hot-swappable Per single system: 108 hot-swappable (9 arrays x 12 drives)
Rack Height of Tray	2U
Drive Midplane	Redundant Fibre Channel loops
RAID Options	Single controller or dual redundant controllers
RAID Level Support	RAID 0, 1, 0+1, 1+0, 3, 5, 3+0, and 5+0 Supports global hot-sparing where applicable
Power and Cooling Options	100-240VAC at 50/60 Hz or -48VDC/-60VDC dual hot-swap/redundant Dual hot-swap/redundant fans (integrated with power supplies)
RAID Controller	1-GB cache per controller; cache battery backup module; six FC ports per controller; hot-swap redundant mirrorable configuration (paired controllers); 1024 LUNs private loop DAS or public loop fabric/switch enabled , 64 LUNs point to point/full fabric per array; 256 command tag queues (CTQs) per controller or controller pair
Daisy Chain Support	Yes, expansion units off of RAID controller equipped arrays
NEBS Compliance	Level 3 certified by Telcordia
MIL-STD Certification	MIL-STD-810F subset compliant for air, land, and marine applications

Additional features of the Sun StorEdge 3510 Fibre Channel array include the following:

- Density of 3.6-TB raw capacity in 2U format (with 300-GB drives)
- Redundant hot-swappable (FRUs)
  - Mirrored cache RAID controller configuration
  - Two power supplies, each with power inlet
  - Two cooling fans integrated into each power and cooling unit FRU
- In-band and out-of-band host-based management
- Non-disruptive firmware upgrades (no downtime for firmware upgrades) in dual-controller RAID configuration
- Dynamic storage capacity expansion (DSCE) and dynamic LUN expansion (DLE)
- Event monitoring and reporting
- Component health monitoring including disk, power, thermal, fans, SES, and SMART-compliant in band and (except for expansion units) out of band

## Product Family Placement



The Sun StorEdge 3510 Fibre Channel array is the flagship product of the Sun StorEdge 3000 family and is positioned at the entry-level storage market segment. Primary target markets include small- to medium-sized businesses, Linux and Windows environments, web applications, and ruggedized environments including the government and telecommunications industry. The Sun StorEdge 3510 Fibre Channel array meets the requirements of a wide range of applications providing a powerful set of flexible and easy-to-use tools. With the Sun StorEdge 3510 Fibre Channel array, customers can pay for what they need today and can easily scale in performance and capacity as their business grows providing compelling solutions for businesses and web applications. The Sun StorEdge 3510 Fibre Channel array is Telcordia certified and ruggedized for telecommunication, industrial, military, air, land, and marine applications.

## Target Markets

Flexibility is a key selling featuring of the Sun StorEdge 3510 Fibre Channel array. The flexible architecture is primarily targeted at traditional small- to medium-sized deployments and business. However, the feature set also targets tier 1/edge computing and carrier-grade/telecommunications-hardened applications.

The Sun StorEdge 3510 Fibre Channel array is ideal for any environment where space is at a premium and FC flexibility is required. Customers should appreciate this array's outstanding versatility which combines enterprise-class high availability features, high-speed performance, flexible configurability, easy-to-use common management options, remote control functionality, and a highly ruggedized package.

The most common applications for a Sun StorEdge 3510 Fibre Channel array include the following:

- Messaging (email or vmail)
- Accounting
- Customer relationship management
- Sales force automation
- E-commerce
- Supply chain management
- Internet applications
- Document management
- Directory services
- Enterprise resource planning
- Application/software development
- Small database (OLTP or DSS)
- Static web content delivery
- File and print
- Proxy caching
- Data warehousing/data mart
- Data analysis/decision support
- Dynamic web content delivery



# Selling Highlights

## Market Value Proposition

The Sun StorEdge™ 3510 Fibre Channel array delivers superior value to the entry-level storage market by combining powerful key enterprise features, functionality, and flexibility with simplicity.

## Key Features, Technical Functions, and Benefits

Feature	Technical Function	Benefit
<ul style="list-style-type: none"> <li>• 2-Gb FC architecture</li> </ul>	<ul style="list-style-type: none"> <li>• Up to 16 Gb/sec. raw bandwidth (eight host channels)</li> </ul>	<ul style="list-style-type: none"> <li>• Very fast access and transfer of information</li> </ul>
<ul style="list-style-type: none"> <li>• Up to eight FC host ports</li> </ul>	<ul style="list-style-type: none"> <li>• For host and expansion capability</li> </ul>	<ul style="list-style-type: none"> <li>• Up to eight direct-attached servers or four redundant paths</li> </ul>
<ul style="list-style-type: none"> <li>• Dual hot-swap/redundant power supplies and fans</li> </ul>	<ul style="list-style-type: none"> <li>• If one fails, the other keeps the array running smoothly; dynamic replacement of failed unit does not disrupt production I/O</li> </ul>	<ul style="list-style-type: none"> <li>• Easy serviceability and enhanced system availability</li> </ul>
<ul style="list-style-type: none"> <li>• 1024 LUNs private loop DAS</li> <li>• 1024 LUNs public loop, full fabric, switch enabled</li> <li>• 64 LUNs point-to-point/full fabric, full duplex</li> </ul>	<ul style="list-style-type: none"> <li>• Separate data sets</li> <li>• Separate data sets</li> <li>• Separate data sets</li> </ul>	<ul style="list-style-type: none"> <li>• Supports many data sets according to server needs</li> <li>• Supports many data sets according to server needs</li> <li>• Supports many data sets according to server needs</li> </ul>
<ul style="list-style-type: none"> <li>• RAID support with hot-swap/global hot-spare drives</li> </ul>	<ul style="list-style-type: none"> <li>• Quick, easy, dynamic failed drive replacement while array is active</li> </ul>	<ul style="list-style-type: none"> <li>• Can be serviced without interruption</li> </ul>
<ul style="list-style-type: none"> <li>• Dual RAID controller configurations</li> </ul>	<ul style="list-style-type: none"> <li>• High-availability RAID (hot-swap/redundant controllers with mirrored cache)</li> </ul>	<ul style="list-style-type: none"> <li>• Access to data is not affected by controller failover</li> </ul>
<ul style="list-style-type: none"> <li>• Expansion arrays</li> </ul>	<ul style="list-style-type: none"> <li>• Daisy-chain to a RAID controller array</li> </ul>	<ul style="list-style-type: none"> <li>• Provides a cost-effective, transaction-intensive configuration</li> </ul>
<ul style="list-style-type: none"> <li>• Industry-standard rack/system cabinet mounting</li> </ul>	<ul style="list-style-type: none"> <li>• Center post or four post compatibility</li> </ul>	<ul style="list-style-type: none"> <li>• Provides flexible cabinet and rack installation</li> </ul>



## Detailed Information on Qualified Operating Systems Environments, HBA's, Servers, Cabling and Expansion Cabinet/Mounting Support

Please refer to the Sun StorEdge 3510 FC – What Works With What matrix for detailed information on the latest Operating Systems, HBA and drivers (Solaris and non-Solaris), peripherals, cables, expansion cabinet/racks and mounting option support. The 3510 WWW can be found by selecting the Sun StorEdge 3510 FC Array matrix link at <http://webhome.ebay/networkstorage/sales/matrix.html>.

Fibre Channel Switch Equipment Qualified with the 3510:

Please refer to the 3510 FC-SATA WWW matrix for detailed information on the latest qualified Switches.

For the most current information, please refer to the “SAN 4.4.X and Solaris 10 WWW”  
<http://sundoc.central/SunWinPublicView.jsp?token=397802>

## System Architecture

The Sun StorEdge 3510 Fibre Channel arrays are rackmountable, NEBS Level 3 certified, mass storage subsystems. The 2U-high Sun StorEdge 3510 Fibre Channel array utilizes 2-Gb Fibre Channel interface both internally to the drives and externally to the host ports.

Configuration management and enclosure event reporting are enabled through an in-band FC or out-of-band 10/100 BASE-T Ethernet port and a DB9 serial port. Sun's host-based Sun StorEdge Configuration Service software is used for management and event monitoring. This software can be also be launched from a web browser.

Each Sun StorEdge 3510 Fibre Channel RAID array holds up to twelve 2-Gb Fibre Channel drives and allows up to eight expansion drive arrays. The Sun StorEdge 3510 Fibre Channel array supports single or dual redundant FC disk array controllers. Each 2-Gb FC controller has 1-GB battery-backed data cache with intelligent caching algorithms and supports RAID levels 0, 1, 0+1, 1+0, 3, 5, 3+0, and 5+0; up to 1024 LUNs in private loop DAS and 1024 LUNs in public loop/full fabric/half duplex and 64 LUNs in point to point mode, full fabric with full duplex support; and 256 command tag queues (CTQs).

Each 2U-high drive array can contain one or two identical 1-GB caching RAID controllers. With two RAID controllers installed, they are configured for redundancy and mirrored write cache so if either controller fails or is removed, the remaining controller takes over the workload (failover). The dual RAID controller in active-active failover configurations is designed to provide fail-safe, continuous, online protection.

Each RAID controller can support up to four direct-attached host I/O ports when in a non-redundant path mode.

Note: In dual controller configurations, the maximum number of direct-attached host I/O ports is eight when in non-redundant path mode.

Both the RAID array and expansion array support up to twelve 1-inch high (low-profile) 2-GB FC disk drives. A maximum configuration (one RAID array plus eight expansion drive arrays) supports up to 108 disk drives. Drive arrays are connected to each other via optional external FC cables.

This rackmountable NEBS Level 3 certified system is an extremely reliable storage system with redundant hot-swappable field-replaceable units (FRUs).

Note: The Sun StorEdge 3510 array can be installed in either a Sun StorEdge expansion rack or the Sun™ Rack 900 series.



Dual hot-swap/redundant load-sharing/load-balancing 100 to 240VAC or -48 or -60VDC power and cooling units each have separate power inputs and contain two high-velocity (52 CFM) fans with detection circuitry to monitor degraded performance provides superior temperature control.

Fan rotation sensors watch for degraded cooling performance which provides superior over-temperature protection.

Each RAID controller includes one event monitoring integrated circuit. This circuit monitors all internal +12 and +5 DC voltage outputs per power and cooling unit. Seven temperature sensors and two fan speed sensors from each unit are monitored by the event monitoring integrated circuit. This circuit controls front and rear panel display LEDs and buzzer alarm.

## Hardware Features

- High-performance hot-swap RAID controller with two FC-AL loops for the attachment of expansion units and four dual-purpose FC-AL loops for servers, FC switches, or expansion units
- Dual FC RAID controllers can be configured in active-to-active failover mode
- Supports 5 to 12 low-profile 3.5-inch Fibre Channel disk drives per RAID array or expansion unit
- Dynamic disk drive storage expansion capabilities within and across RAID and expansion unit chassis
- Supports up to eight expansion units per RAID array for a total of 108 disk drives
- Supports 36-GB 15000-rpm, 73-GB 10000-rpm, 73-GB 15000-rpm, 146-GB 10000-rpm and 300-GB 10000-rpm disk drives
- All major components such as FC disk drives, RAID controllers, lithium-ion batteries, and power and cooling are redundant hot-swappable field replaceable units (FRUs)
- All FRUs are easily removed without the use of tools; thumbscrews are used to secure all FRUs
- Configuration management and event reporting enabled through in-band Fibre Channel or out-of-band 10/100BASE-T Ethernet port and serial port
- The 2U Sun StorEdge 3510 Fibre Channel array incorporates System Enclosure Services (SES) circuits to monitor enclosure environmental information:
  - The SES circuitry alarm buzzer and green/amber LED indicators on front and rear panels provide environmental and hardware status on enclosure and FRUs.
  - The SES controller intelligence monitors all internal +12 and +5 voltages per power and cooling unit. The SES controller chip monitors the various temperature sensors located throughout the enclosure, and monitors each fan.
  - Both RAID and expansion unit enclosures can support dual SES failover capabilities for fully redundant event monitoring reliability.
  - The SES protocol can be connected in-band (via FC cable) from one Sun StorEdge 3510 RAID array to a Sun StorEdge 3510 expansion array without the need for other external cables.
  - Auto detection of installation of all major components such as disk drives, fan trays, power supplies, and RAID controllers are monitored by the SES logic.
- Dual redundant hot-swap power supplies provides N+1 high availability
- Power supplies feature load-sharing/load balancing, and auto ranging AC and DC voltage input capability
- Four high-speed (52-CFM) fans provide redundancy N+1 high availability and efficient cooling



- Redundant hot-swappable or hot-serviceable FRUs
  - Active/active RAID controller modules
  - Hot-swappable disk drives (air management sleds are placed in empty drive slots)
  - N+1 redundant hot-swappable power and cooling units with common power rail for continuous fan operation even if one unit has been shut down
  - Hot-swappable battery cache modules
  - All FRUs easily accessible from the front or rear of the system
- Front and rear green/amber bi-color LEDs and resettable audible alarm for fault isolation
- Designed and tested to pass NEBS Level 3; GR-63-CORE, GR-1089-CORE
- Designed and tested to pass a subset of MIL-STD-810F air, land, and marine deployment
- Web-based 10/100BASE-T Ethernet support for management and monitoring
- Serial port out-of-band management and monitoring with remote monitoring support
- 1-GB ECC cache memory per controller, fixed non-upgradeable
- Battery backup for cache, approximately 72 hours hold time

## **Firmware Features**

- Simultaneous support for RAID levels 0, 1, 0+1, 1+0, 3, 5, 3+0, and 5+0
- Local and global spare disk drives, with applicable RAID levels
- Up to 1024 LUNs private loop DAS, 1024 LUNs public loop/full fabric switch enabled/half duplex, 64 LUNs point to point/full fabric/switch enabled/full duplex.
- Firmware LUN masking
- Non-disruptive controller firmware upgrades (no downtime for firmware upgrades) in dual-controller RAID chassis
- Logical volume support (spanning logical drives)
- Write back and write through cache control (factory default is write back)
- In-band and out-of-band SES support for RAID arrays
- Built-in SNMP traps and MIB support
- Online drive firmware flash support via the CLI
- Supports Sun StorEdge Enterprise Storage Manager Advanced Applications Management Software for SE 3500 (ESM-AA) to monitor Sun StorEdge 3510 FC RAID arrays.

## **Input Power Options**

- Dual-input load-sharing/load-balancing 100 to 240VAC universal input, load sharing
- Dual-input load-sharing/load-balancing -48VDC (-36VDC to -72VDC) or -60VDC input capabilities available



## Power and Cooling Units

The Sun StorEdge 3510 Fibre Channel array has two fully redundant 420-Watt power supplies with load-sharing and load-balancing capabilities. Each AC power and cooling unit has auto-ranging capability from 90VAC to 264VAC and 47 to 63Hz. With these redundant power supplies, one maintains electrical power to the system if the other fails.

A single power and cooling unit can spin up, maintain, and sustain power for a fully loaded Sun StorEdge 3510 Fibre Channel array unit.

DC output voltages have over-voltage protection, over current, and short circuit protection. Output current capacity is shown in the table below.

DC Output	Minimum Load	Maximum Load
+5 V	0 A	35 A
+12 V	250 mA	25 A

Both power and cooling units are removable canisters that slide into one of two slots in the back of the system. Each power and cooling unit canister has a locking handle, power status LED, AC power cord connector, and power switch.

Each power and cooling unit housing contains two axial 52 CFM fan assemblies. Each fan is electrically isolated and powered by +12-volt common rail. This allows the fans to continue to run from the redundant power and cooling unit even though their power and cooling units are turned off. Both 80-mm axial fans are connected together in series to allow blade synchronization upon power on.

Each power and cooling unit is hot-swappable and can be replaced while the Sun StorEdge 3510 Fibre Channel array controller and expansion arrays are in operation. Only one power and cooling unit can be hot-swapped at a time.

## Sun StorEdge 3510 Fibre Channel Array I/O Architecture

There are two sections on this topic:

- Section 1 discusses the particulars of the Fibre Channel I/O ports as they relate to the RAID and expansion arrays.
- Section 2 provides example connectivity rules and guidelines for certain storage and server scenarios.


### Section 1

#### Major Components, RAID Array

The Sun StorEdge 3510 Fibre Channel RAID array includes the following major components, as shown in the figure below:

- Power and cooling units (1)
- RAID controllers (2)
- Ethernet, serial, battery (3)



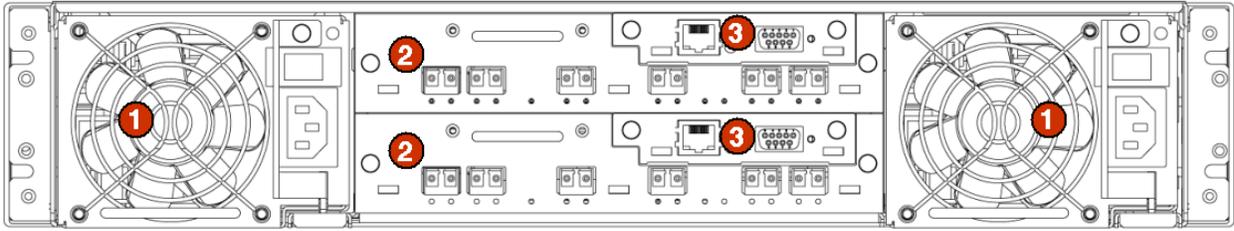


**Figure 2.** Major components, RAID array

### Rear Panel Connectors, RAID Array

The following connectors are located on the modules of the rear panel of the RAID unit.

Connector Type	Location
Ethernet RJ-45 10BASE-T connector	Battery module
DB9 serial connector	Battery module
Fibre Channel connectors	RAID-I/O module
AC power outlets	Power and cooling unit
DC power outlets	Power and cooling unit

Note: Each array can support either AC or DC power, not both simultaneously.

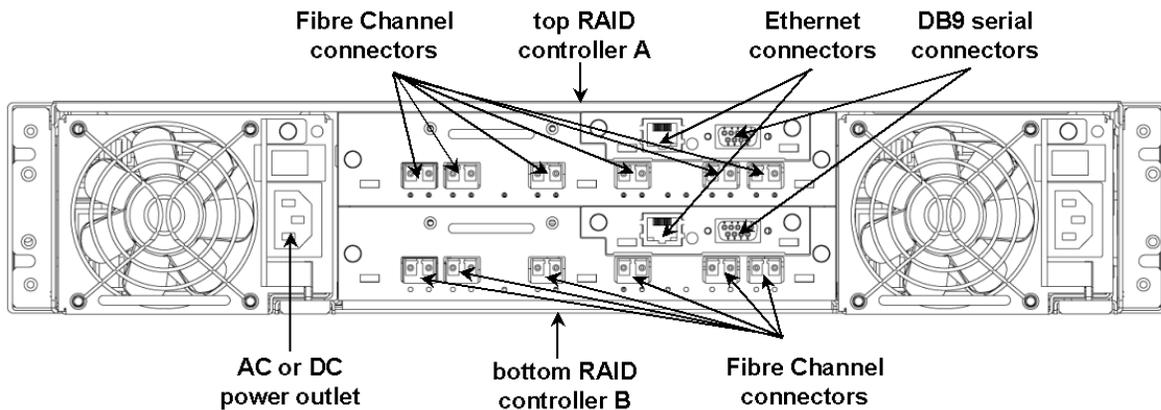

**Figure 3.** Rear panel of RAID array, dual controller configuration

### RAID Fibre Channel I/O Ports

Important notes:

Note 1: All Fibre Channel ports require SFP modules before they can be used. Some configurations ship with factory-installed SFP modules.

Note 2: In the single RAID controller, these SFPs are installed in Fibre Channel ports 0, 1, 4, and 5. In a dual RAID controller, they are installed in ports 0, 1, 4, and 5 in the top controller and 0 and 5 in the bottom controller.

Note 3: In the expansion unit, SFPs are installed in the top left and bottom right ports.




Note 4: The default SFPs are short-wave (part number XSFP-SW-2GB). Optional long-wave SFPs are available (XSFP-LW-2GB).

Note 5: Please refer to Figure 5 below for proper SFP placement.



**Figure 4.** Small form factor pluggable (SFP) modules

Each RAID controller integrates Fibre Channel I/O ports, 0, 1, 2, 3, 4, and 5 within each RAID FRU module. Therefore, in a dual controller configuration, there are two RAID I/O modules, each with six Fibre Channel ports for a total of 12 ports.

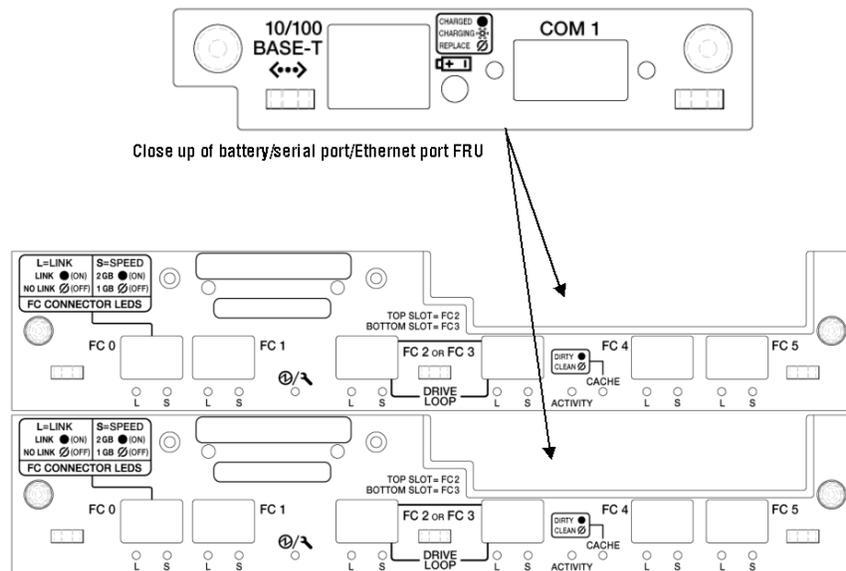


**Figure 5.** RAID-I/O FRU, Sun StorEdge 3510 Fibre Channel array (dual RAID controller configuration)

**Note 1:** All Fibre Channel ports can be used for drive connectivity.

**Note 2:** FC ports 0, 1, 4, and 5 can be used for host or drive connectivity.

**Note 3:** FC ports 2 and 3 can only be used for drive connectivity.



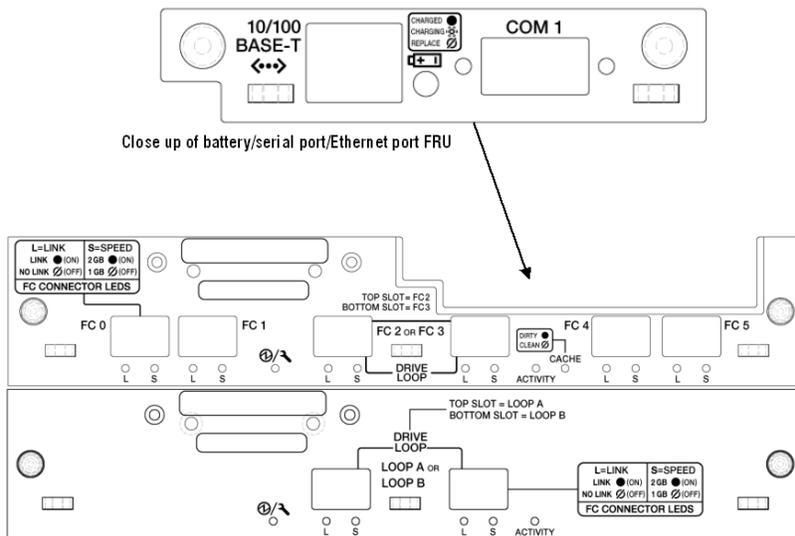

**Figure 6.** RAID-I/O FRU, Sun StorEdge 3510 Fibre Channel array (single RAID controller configuration)


These components are located on the RAID Fibre Channel I/O FRU of the Sun StorEdge 3510 Fibre Channel array (dual RAID controller version):

- Six Fibre Channel I/O ports per RAID controller (12 in dual controller configuration)
- Hot-swappable battery module with integrated 10/100 Ethernet port and 9-pin serial port per RAID controller

### Rear Panel Connectors, Expansion Array


The following connectors are located on the modules of the rear panel of the expansion unit.

Connector Type	Location
Fibre Channel connectors	I/O module
AC power outlets	Power and cooling unit
DC power outlets	Power and cooling unit

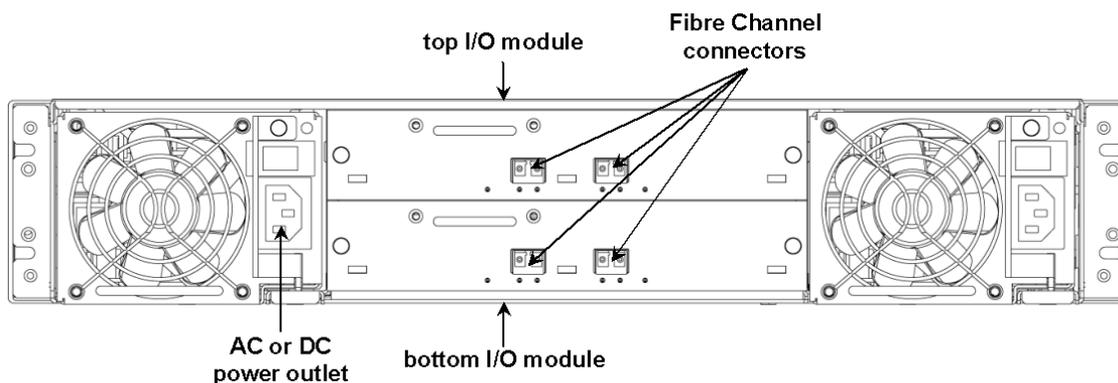

**Figure 7.** Rear panel of expansion array  
Storage Expansion Fibre Channel I/O Ports



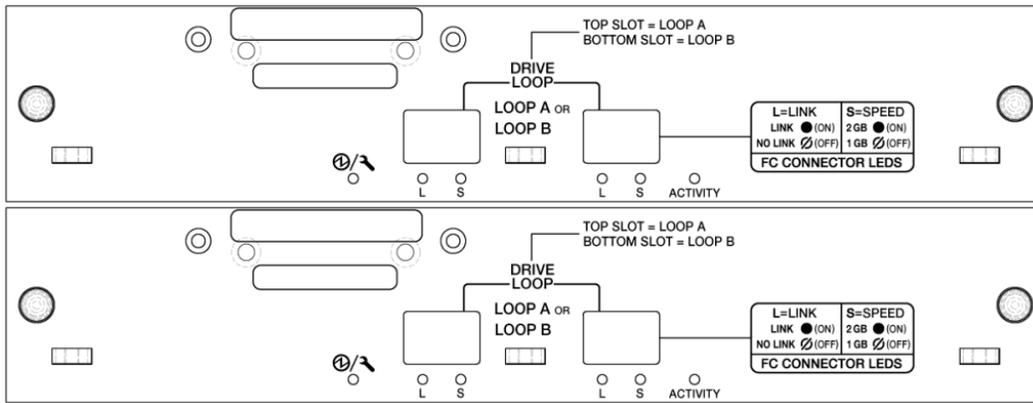

**Figure 8.** Expansion-I/O modules, Sun StorEdge 3510 Fibre Channel array

*Note: Each Sun StorEdge 3510 FC expansion unit ships with both the top and the bottom I/O module, as depicted in the figure above.*

Four Fibre Channel I/O ports total are located on the expansion I/O modules of the Sun StorEdge 3510 Fibre Channel array.

## Logical Drive and LUN Configuration Guidelines

There are limitations in regards to the maximum number of disk and logical drive configuration with specific RAID sets. The tables below show the correspondence between the number of disks supported, LUN capacity, and RAID levels.

Note: Random optimization uses a 32-KB block size and supports a 512-GB LUN capacity. Sequential optimization uses a 128-KB block size and supports a 2-TB LUN capacity.

### Maximum Number of Disks per Logical Drive with Multiple LUNs

Disk Capacity	RAID 5	RAID 5	RAID 3	RAID 3	RAID 1	RAID 1	RAID 0	RAID 0
	Random	Sequential	Random	Sequential	Random	Sequential	Random	Sequential
34.2 GB 73.4 GB 146.8 GB 300 GB	108	108	108	108	108	108	108	108

Note: The number of disks applies to all disk capacity types.

### Maximum Number of Disks per Logical Drive with a Single LUN

Disk Capacity	RAID 5	RAID 5	RAID 3	RAID 3	RAID 1	RAID 1	RAID 0	RAID 0
	Random	Sequential	Random	Sequential	Random	Sequential	Random	Sequential
34.2 GB 73.4 GB 146.8 GB 300 GB	108	108	108	108	108	108	108	108

Note: The number of disks applies to all disk capacity types.

### Maximum Usable Capacity per LUN (TB)



Disk Capacity	RAID 5	RAID 5	RAID 3	RAID 3	RAID 1	RAID 1	RAID 0	RAID 0
	Random	Sequential	Random	Sequential	Random	Sequential	Random	Sequential
34.2 GB	3.69	3.69	3.69	3.69	3.69	3.69	3.69	3.69
73.4 GB	7.93	7.93	7.93	7.93	7.93	7.93	7.93	7.93
146.8 GB	15.85	15.85	15.85	15.85	15.85	15.85	15.85	15.85
300 GB	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4

## Section 2: Connectivity Rules and Guidelines

The Sun StorEdge 3510 Fibre Channel array can be configured in three modes:

1. Private loop (DAS connectivity)
2. Point to point, fabric switch attached (switch fan out, full duplex)
3. Public loop, fabric switch attached (switch fan out, half duplex)

The internal hub ASIC that enable this configuration change is configurable via the management software. The selection for "Loop Only" or "Point to Point" plus the correct cabling allows the three configurations.

The following screen shot shows the actual GUI where the selection is made to configure the array for private loop or point to point mode.

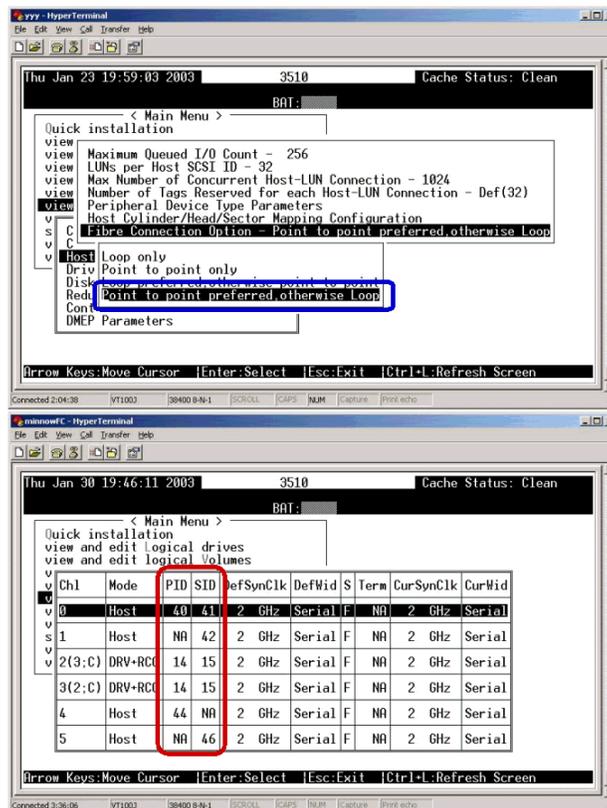


Figure 9. Configuration menu for private loop or point to point mode




## Private Loop Mode — Direct Attached Connection (DAS)

- Features
  - Cost-effective path failover support without switches
  - Four redundant host port connections
  - Eight non-redundant host port connections
  - Maximum port utilization
  - Maximum LUN utilization (up to 1024 LUNs)
- Caveats
  - Limited to four redundant host connections
  - No duplex support for increased performance
  - No external networked storage capability

### Private Loop — Four Discrete Loop Segments

- I/O cards provide four discrete channels for host attachment
- The four channels are implemented as four separate loop segments using FC-AL hub technology
- Each loop segment allows two host connections to both the primary and the secondary controller

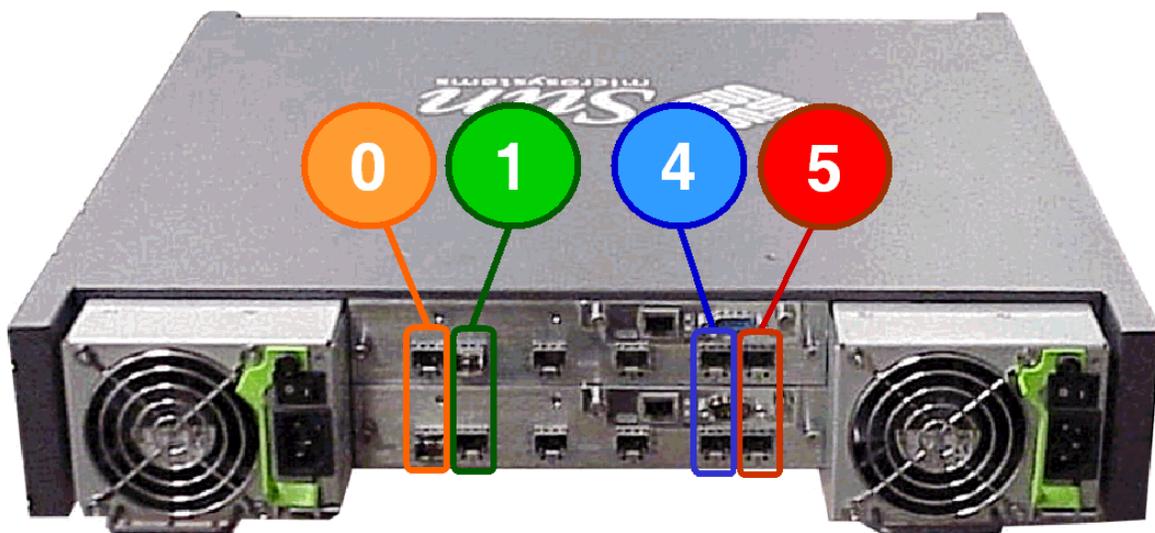

**Figure 10.** Four discrete loop segments (host port channels 0, 1, 4, 5)

## Scenario 1, Point to Point Connectivity

Dual controllers with eight direct-attached servers in non-redundant path mode and no expansion units.


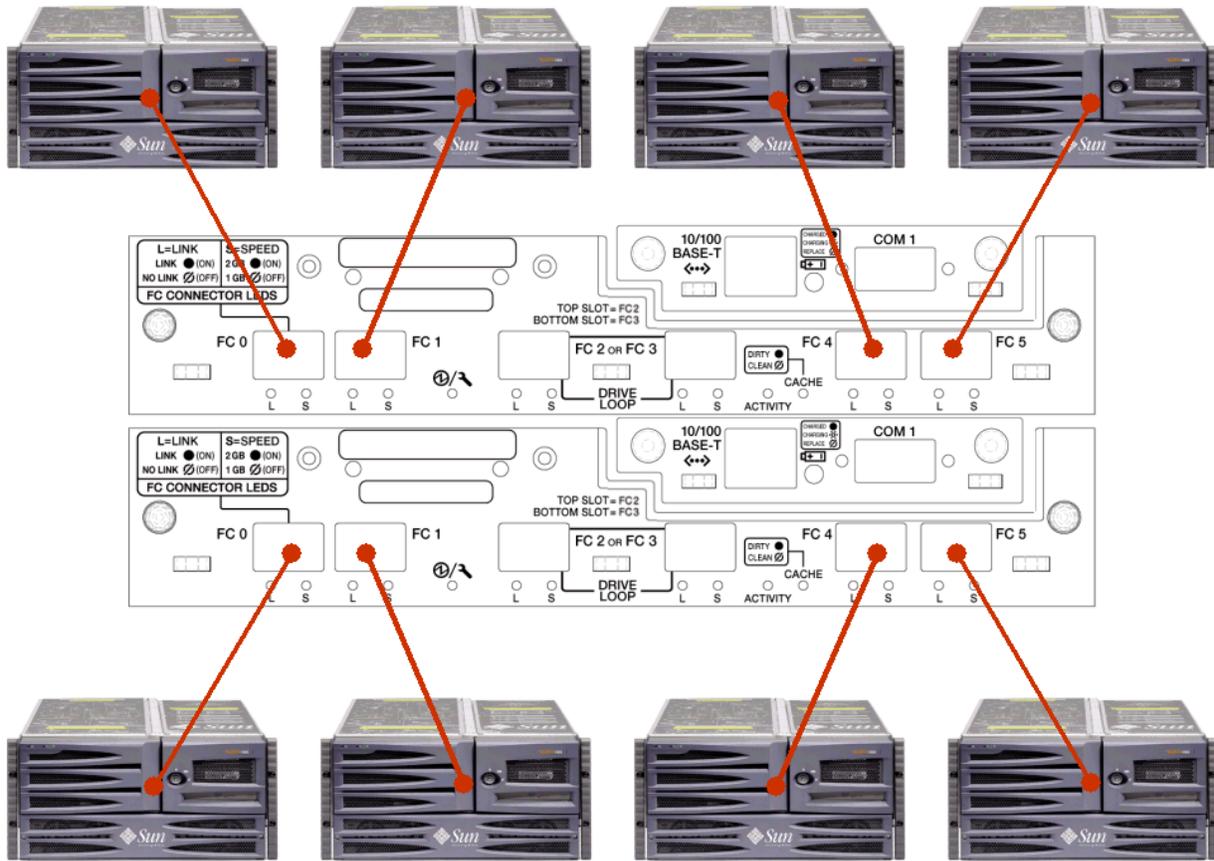


Figure 11. Scenario 1, private loop connectivity option

Note: Controllers are NOT hot-swappable in this configuration.

## Scenario 2, Point to Point Connectivity

Dual controllers with four direct-attached servers in redundant path mode and no expansion units.

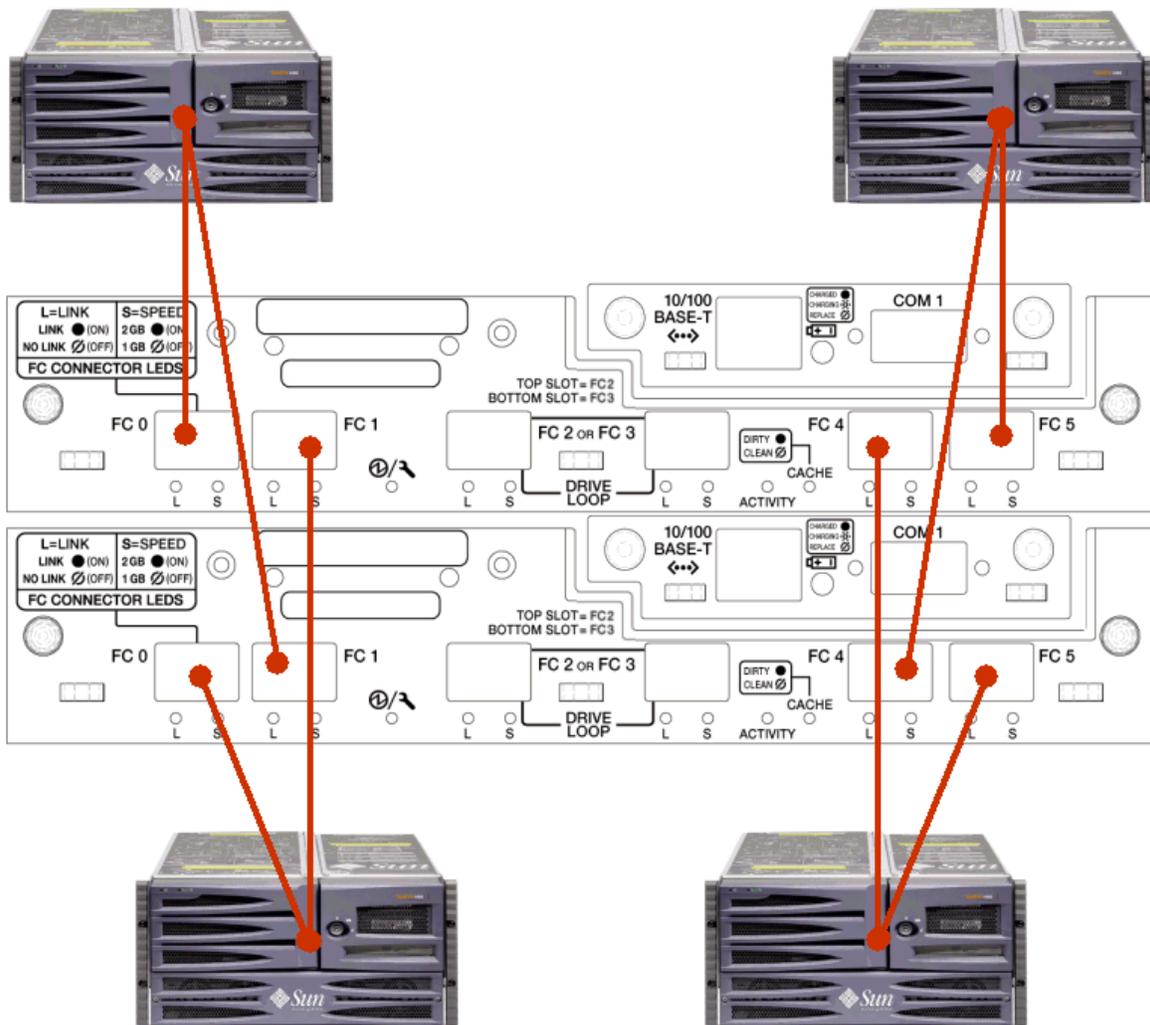


**Figure 12.** Scenario 2, private loop connectivity option

Note: Controllers ARE hot-swappable in this configuration when used in conjunction with Sun StorEdge Traffic Manager alternate pathing software.

### Scenario 3, Point to Point Connectivity

Dual controllers with eight expansion units and two direct-attached servers in redundant path mode.

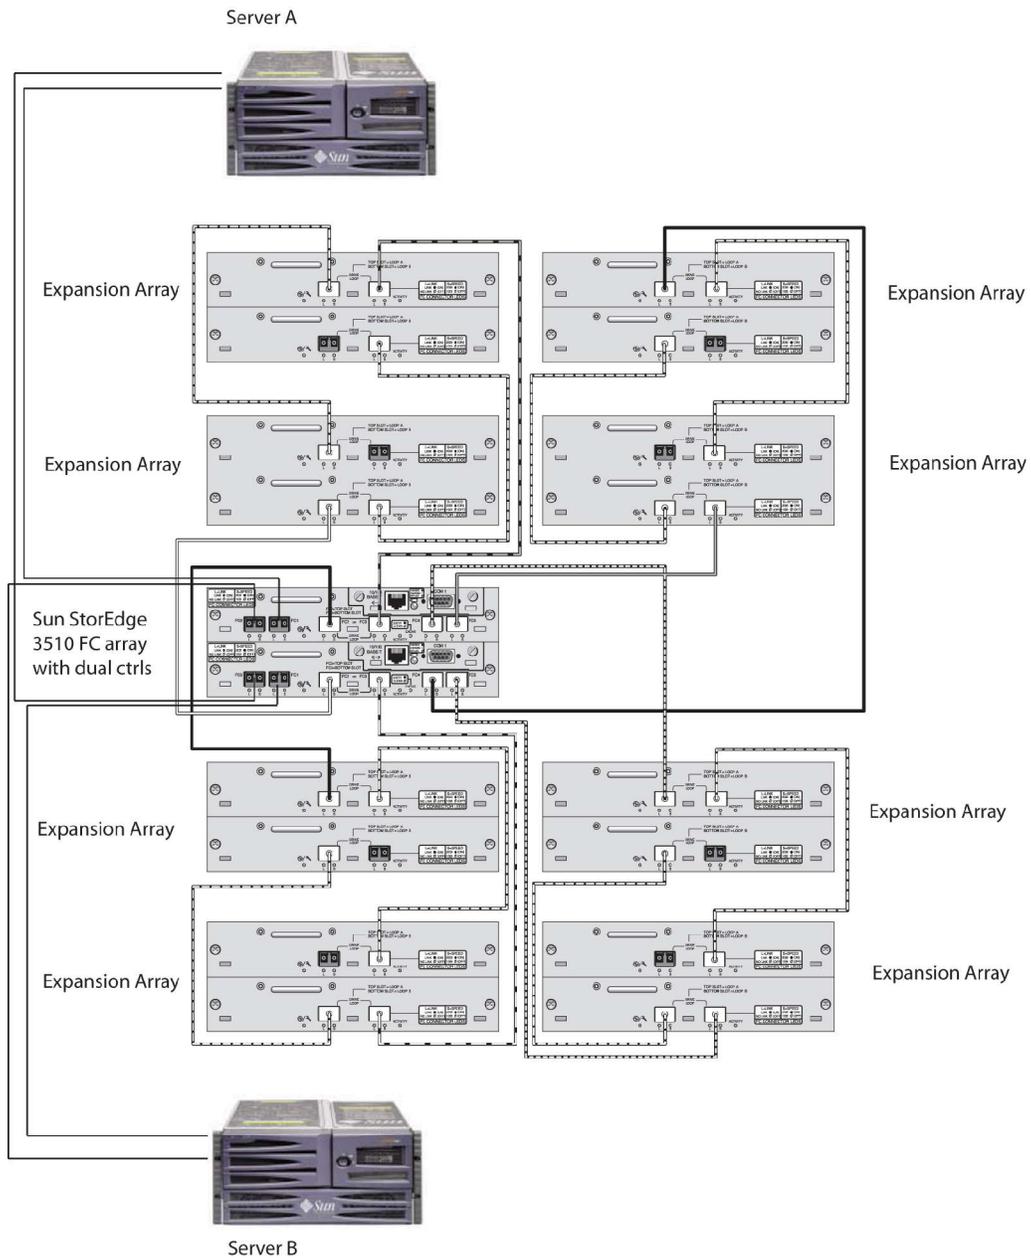

**Figure 13.** Scenario 3, private loop connectivity option

Note: Controllers ARE hot-swappable in this configuration when used in conjunction with Sun StorEdge Traffic Manager alternate pathing software.



## Scenario 4, Point to Point Connectivity

Single controller with four direct-connected servers in non-redundant path mode with two expansion units.

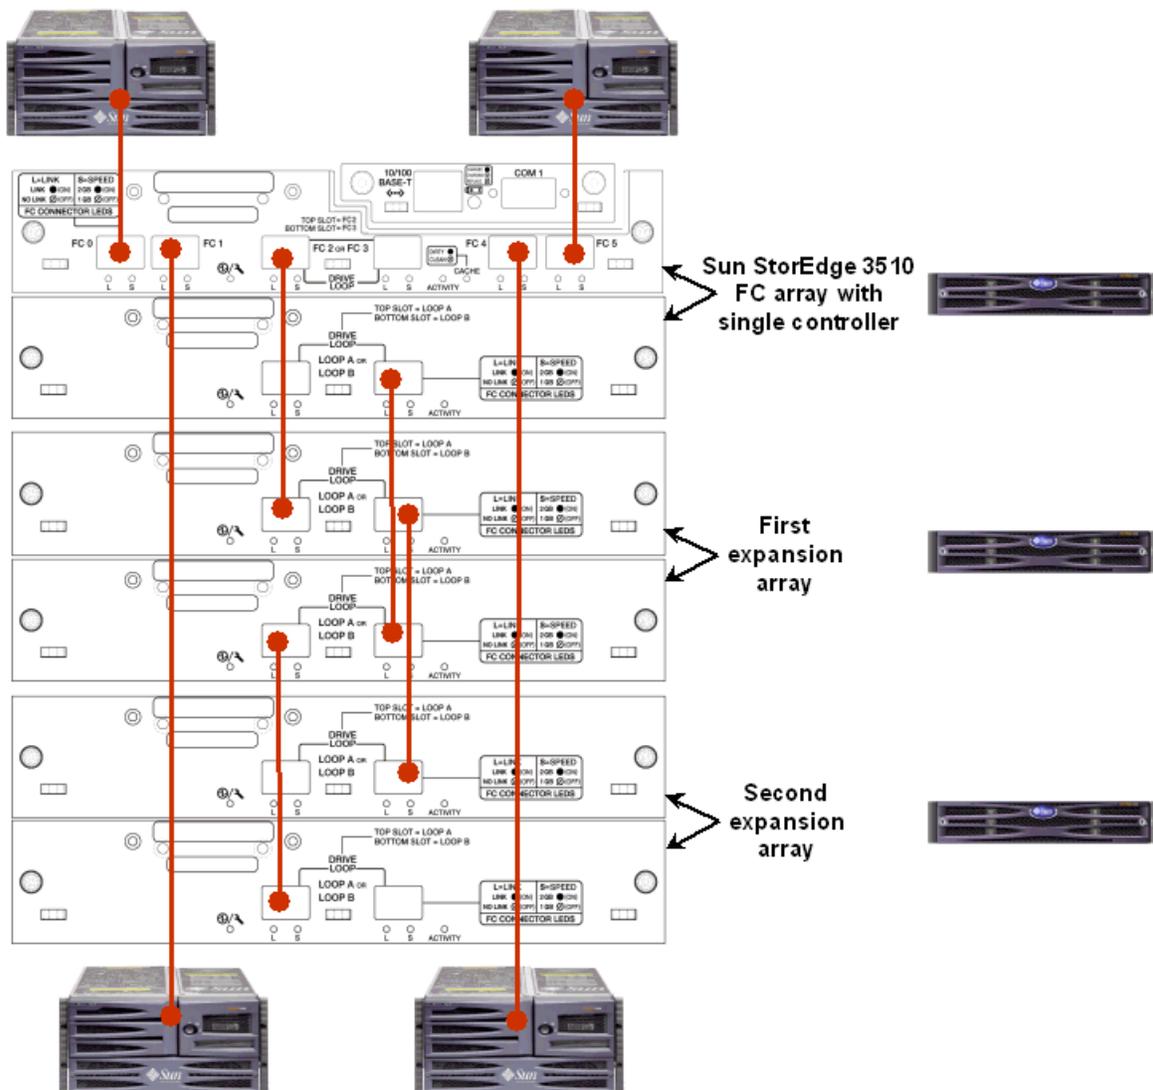



Figure 14. Scenario 4, private loop connectivity option

### Point to Point Mode — Fabric Switch Attached

- Features
  - External networked storage
  - Sun SAN 4.2/4.3/4.4 support
  - Maximum number of host connections via switch fan out
  - Best performance with full duplex support



- Caveats
  - Limited to two redundant/four switch port connections
  - Used in pairs for LUN/path failover
  - Limited to 64 LUNs maximum (16 mirrored LUNs per loop pair)

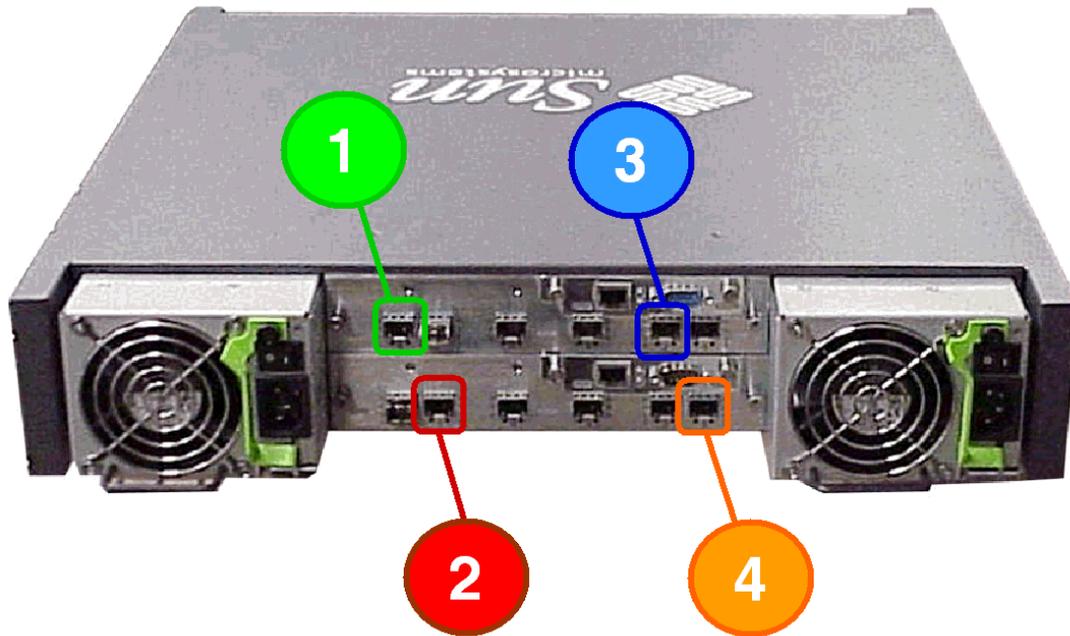

**Figure 15.** Four 2-Gb Fibre Channel point to point connections


- Up to 14 hosts may be attached via dual 16 port fabric switches for high availability
- Two channels are used per fabric
- LUNs are mapped in an interlaced fashion across both controllers
- Two channels per controller

### Public Loop Mode — Fabric Switch Attached

- Features
  - External networked storage
  - Sun SAN 4.2/4.3/4.4 support
  - Maximum LUNs for fabric switch attached (1024 LUNs)
  - Maximum number of host connections via switch fan out
- Caveats
  - Half duplex only (paths are in a loop vs. parallel)
  - No full duplex support for increased performance (vs. point to point full duplex)
  - Limited to two redundant/four switch port connections
  - Used in pairs for LUN/path failover

## Configuring for Point to Point or Public Loop Mode

- Verify that the controller port personality is set for "point to point mode" or "loop mode." This selection is made via the management software option and sets the internal hub and port bypass circuits to the appropriate configuration. Point to point mode provides full duplex/best performance but is limited to 64 LUNs total. Loop mode provides 1,024 LUNs total but is half duplex with less performance vs. point to point mode (assuming duplex software configuration support).
- Port/cable connectivity is the same for "point to point mode" or "loop mode."

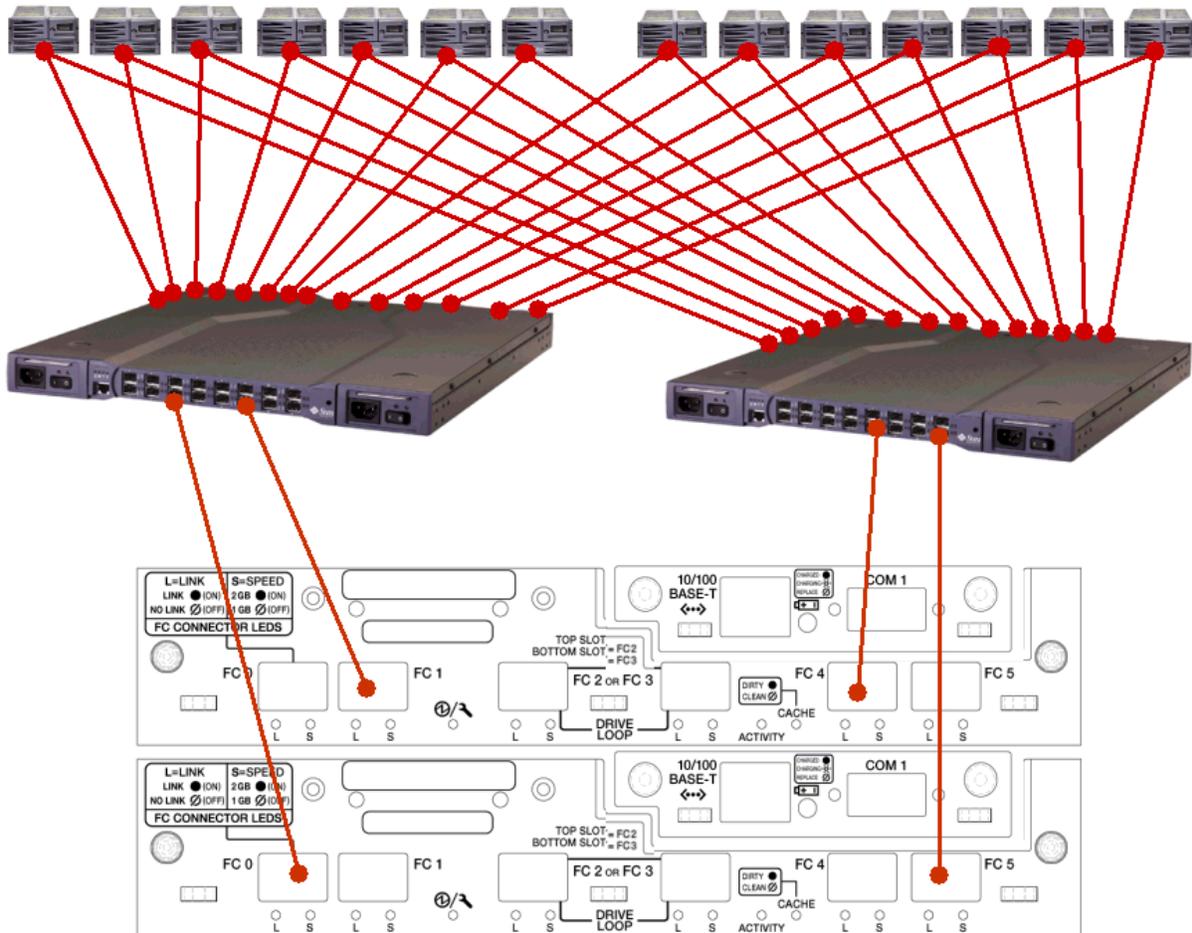

## Connecting COM Port to a VT100 Terminal or Workstation

For a first-time configuration, users must assign an IP address to the chassis via the COM port of either controller module. Users can configure the RAID controller drive array via the COM port, or via the Ethernet port after they set up the IP address.

When users configure the RAID controller drive array for the first time, it automatically configures the primary controller and transfers the same configuration to the secondary controller.

## Connecting Ethernet Port to LAN/WAN

To connect a RAID controller drive array to an Ethernet port, users must first assign an IP address to the RAID controller drive array via the Sun 2U COM port and a VT100 terminal or workstation.

Connect the Ethernet port of one of the controllers to the LAN connection. This connection allows for configuration and monitoring of RAID controller and expansion drive arrays remotely.

Note: In a dual-controller configuration, the Ethernet ports on both controllers must be connected in order to fully manage the array when one controller fails.

## Front Panel Indicators

This section describes the components accessed at the front of the Sun StorEdge 3510 Fibre Channel array.


- Light indicators at the far right hand side of panel indicating (from top to bottom):
  - Power
  - Fan
  - Temperature
  - Event

Immediately below the Event LED is an audible-alert RESET push button.

Behind the lockable front door are:

- Drive bays containing plug-in disk drives (drive sleds)
- Light indicators (LEDs) indicating drive status adjacent to each drive bay



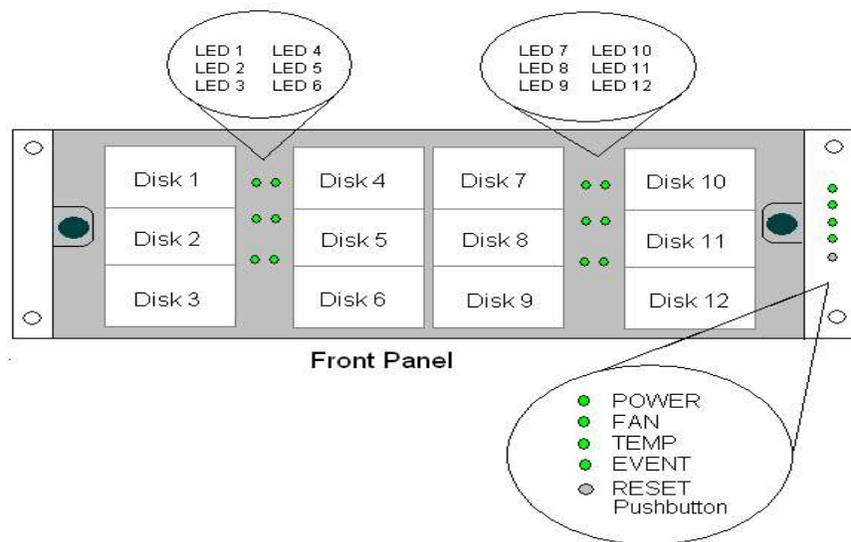

**Figure 18.** Front panel of the Sun StorEdge 3510 Fibre Channel array

## Status LEDs

The Sun StorEdge 3510 Fibre Channel array's LEDs are listed in the following tables.

### Front Panel LEDs on Right Side (arranged from top to bottom as listed)

LED	Purpose	Color Code
Power	Power and cooling unit status - DC output voltage within tolerance specification. Over-current protection shutting down any voltage output is also displayed. Voltage thresholds: <ul style="list-style-type: none"> <li>+5VDC +/-0.25 VDC</li> <li>+12VDC +/-0.6 VDC</li> </ul> Current thresholds: <ul style="list-style-type: none"> <li>+5VDC 35 A</li> <li>+12VDC 25 A</li> </ul>	Static Green = Good Static Amber = Failed = One or more output voltages out of range
Fan	Fan speed within nominal operational rpm specification of 5000 rpm Failed Fan RPM Threshold: 3150 rpm	Static Green = Good = Over 3150 rpm Static Amber = Faulty/Failed = Under 3150 rpm
Temp	Temperature level status indicating violations of internal temperature thresholds of 55° and 60°C	Static Green = Good = Under temperature threshold of 55°C Static Amber = Failed = Temperature threshold equal to or over 55°C Blinking Amber = Failed = Temperature threshold equal to or over 60°C Blink Frequency of 4 Hz +/- 1 Hz
RAID I/O	Status indicator to indicate any failure event in RAID controller or I/O board	Static Green = Good = Normal functional operation of RAID controller or I/O board Static Amber = Failed RAID controller or I/O board
Drives	Drive power up and spin up OK Drive activity Drive failure	Static Green Flashing Green (random blink pattern) Static Amber

### Rear Panel LED on RAID Controller

LED	Purpose	LED Color Definition
Busy Status LED	Busy status of host and disk ports	Static Green = not busy Blinking Green = Busy
I/O FRU Status LED	Status of RAID controller and I/O module	Static Green = Good Static Amber = Failed RAID controller or I/O module
Battery Charge LED	Status of battery	Static Green = Battery charged Blinking Green = Battery charging Static Amber = Battery failed
Dirty Cache LED	Status of memory cache; dirty cache indicates if data is not written to disk.	LED off = Clean cache Static Amber = Dirty cache



LED	Purpose	LED Color Definition
SFP Left LED	SFP status	Static Green = Good Fibre Channel connection Off = Empty or failed FC connection
SFP Right LED	SFP speed status	Static Green = 2 Gb Off = 1 Gb
Power and Cooling LED	Power and cooling unit status; DC output voltage within tolerance specification. Over-current protection shutting down any voltage output is also displayed. Voltage thresholds: <ul style="list-style-type: none"> <li>• +5 VDC +/-0.25 VDC</li> <li>• +12 VDC +/-0.6 VDC</li> </ul> Current thresholds: <ul style="list-style-type: none"> <li>• +5VDC 35 A</li> <li>• +12 VDC 25 A</li> </ul>	Static Green = Good Static Amber = Failed = One or more output voltages out of range /fan speed under 3150 rpm
Ethernet Link LED	Status of Ethernet link	Static Green = Active link Off = Inactive connection
Ethernet Active LED	Status of Ethernet activity	Flashing Green = Busy



# Reliability, Availability, and Serviceability (RAS)

The Sun StorEdge™ 3510 Fibre Channel array includes the reliability, availability, and serviceability (RAS) features listed below.

## Reliability

The reliability features of the Sun StorEdge 3510 Fibre Channel array include:

- NEBS Level 3 certified
- MIL-STD-810F compliant for air, land, and marine deployment
- Load-sharing/load-balancing extends power and cooling unit life

## Availability

Availability features of the Sun StorEdge 3510 Fibre Channel array include:

- Dual hot-swap/redundant load-sharing/load-balancing power supplies with separate inputs
- Hot-swap/redundant high-velocity (52 CFM) electrically isolated cooling fans are powered by a +12-volt common rail and contain detection circuitry to monitor degraded performance provide superior temperature control. Fans continue to run from the redundant power and cooling unit even though their power and cooling unit is turned off. The twin 80-mm axial fans in each power and cooling unit are connected together in series to allow blade synchronization upon power up.
- Hot-swap redundant event monitoring units
- Hot-swap redundant RAID controllers with mirrored synchronized-write cache (optional configuration)

## Serviceability

### Failover

The Sun StorEdge 3510 Fibre Channel array supports both hard- and soft-failover capabilities.

- Hard failover

The Sun StorEdge 3510 Fibre Channel array automatically switches from the failed component to the redundant component.

- Soft failover

The Sun StorEdge 3510 Fibre Channel array provides the ability to manually failover a component for hardware upgrades, and so on.



## Field-Replaceable Units (FRUs)

The Sun StorEdge 3510 Fibre Channel array's major components are field-replaceable units (FRUs) and are easily accessible from the front or rear of the unit. Each FRU has a set of LEDs which indicate health and status of the array. Virtually any single hot-swap field-replaceable unit (FRU) can be removed quickly and easily from the subsystem while running applications. All FRUs are easily accessible from the front or rear of the subsystem.

The Sun StorEdge 3510 Fibre Channel array consists of four types of FRUs that are easily removed without tools. These are:

- RAID controllers (one or two) (Sun StorEdge Traffic Manager alternate pathing software and specific cabling methodology is required for hot-swap RAID controllers)
- Battery backup module (one or two)
- Two power supplies, AC or DC with integrated power and cooling unit
- Up to twelve 2-Gb FC disk drives (hot-swappable)



# Specifications

## Physical Specifications

Description	Desktop	Rackmount
Height	3.64 in. (9.25 cm)	3.5 in. (8.89 cm) (2U)
Width	19 in. (48.26 cm)	17.6 in. (44.70 cm) (body)
Depth	<ul style="list-style-type: none"> <li>• Main chassis 18.0 in. (45.72 cm)</li> <li>• Chassis with fan modules 20.0 in. (50.80 cm)</li> <li>• Chassis with fan modules and handles 21.0 in. (53.34 cm)</li> </ul>	
Unpackaged Weight (without drives)	30 lb. (13.61 kg)	
Packaged Weight (without drives)	37 lb. (16.78 kg)	
Weight (fully loaded with 12 drives)	50 lb. (22.68 kg)	
Packaged Weight (fully loaded with 12 drives)	57 lb. (25.86 kg)	

## Heat and Air Flow

- Air flow for the Sun StorEdge™ 3510 array is from front to rear.
- A fully populated array dissipates 1212 BTU's per hour during normal operation.

## Primary Input Voltage/Frequency Range

- Input selection is automatic, and the power supply operates continuously over the required range.
- The AC power supply is capable of supplying full rated output power in the input voltage range of 90 VAC to 250 VAC from a single phase source.
- The following table shows input power at different voltage s, 50Hz (worst case), and states of operation for 2 AC power supplies in Watts, Amps and BTUs:

Watts per Input Voltage/Frequency	Idle	Operating	Spin Up
90 VAC / 50 Hz	333.9 Watts	362.7 Watts	607.5 Watts
115 VAC / 50 Hz	316.2 Watts	350.7 Watts	579.6 Watts
264 VAC / 50 Hz	335.3 Watts	367.0 Watts	562.3 Watts
Amps per Input Voltage/Frequency	Idle	Operating	Spin Up
90 VAC / 50 Hz	3.71 Amps	4.03 Amps	6.75 Amps
115 VAC / 50 Hz	2.75 Amps	3.05 Amps	5.04 Amps
264 VAC / 50 Hz	1.27 Amps	1.39 Amps	2.13 Amps
BTU's per Input Voltage/Frequency	Idle	Operating	Spin Up



90 VAC / 50 Hz	1139 BTU's	1237 BTU's	2073 BTU's
115 VAC / 50 Hz	1079 BTU's	1196 BTU's	1977 BTU's
264 VAC / 50 Hz	1144 BTU's	1252 BTU's	1918 BTU'

- The following table shows input power at different voltages, 60 Hz, and states of operation for 2 AC power supplies in Watts, Amps, and BTU's.

Watts per Input Voltage/Frequency	Idle	Operating	Spin Up
90 VAC / 60 Hz	325.8 Watts	364.5 Watts	605.7 Watts
115 VAC / 60 Hz	320.8 Watts	355.3 Watts	572.7 Watts
264 VAC / 60 Hz	351.1 Watts	382.8 Watts	580.8 Watts
Amps per Input Voltage/Frequency	Idle	Operating	Spin Up
90 VAC / 60 Hz	3.62 Amps	4.05 Amps	6.73 Amps
115 VAC / 60 Hz	2.79 Amps	3.09 Amps	4.98 Amps
264 VAC / 60 Hz	1.33 Amps	1.45 Amps	2.20 Amps
BTU's per Input Voltage/Frequency	Idle	Operating	Spin Up
90 VAC / 60 Hz	1112 BTU's	1244 BTU's	2067 BTU's
115 VAC / 60 Hz	1094 BTU's	1212 BTU's	1954 BTU's
264 VAC / 60 Hz	1198 BTU's	1306 BTU's	1982 BTU's

## Power Input/Output

Numbers shown for the Sun StorEdge 3510 Fibre Channel array are for a single power and cooling unit mode of operation, and these numbers are double in a dual redundant power and cooling unit mode.

### AC Primary Input Voltage/Frequency Range

- Input selection is automatic, and the power and cooling unit operates continuously over the required input range.
- The power and cooling unit is capable of supplying full rated output power in the input voltage range of 90VAC to 264VAC from a single phase source.
- Input current meets the limits shown in the following table:

Input Voltage	Maximum Input Current	Maximum Inrush Current
115VAC	10 A	50 A peak
230VAC	5 A	100 A peak

Inrush current shall be less than 100A peak for 2 msec. and 30A peak for 50 msec., at peak nominal line from a cold start. Inrush current shall be measured after the power and cooling unit has idled for a minimum of 10 minutes at an ambient temperature of 25°C, with the input voltage source removed.

### DC Output Voltages/Currents/Power

- The power and cooling unit provides two DC output voltages, +5VDC and +12VDC.



- The voltage outputs are capable of supplying the output current shown in the following table, subject to a combined maximum output power of 420 Watts.

Output	Nominal Output (VDC)	Minimum	Maximum	Units	Conditions
1	5 V	0.0	35	A	
2	12 V	0.25	25	A	Peak 35A/15 sec.

## Capacitive Loads

The power and cooling unit can to power up and operate normally with the following capacitances simultaneously present on the DC outputs.

Output	+12VDC	+5VDC
Capacitive load (uF)	6,000	10,000

- DC input voltages/currents/power: Optional -48VDC (-36VDC to .72VDC) or -60 input capabilities available.

## AC and DC Input Power Version

- AC input power version (both power supplies operating)
  - Nominal input voltage: 100VAC to 240VAC
  - Input voltage range: 90VAC to 264VAC
  - Input frequency range: 47 Hz to 63 Hz
- DC input power version (both power supplies operating)
  - Nominal input voltage: -48 or -60VDC
  - Input voltage range: -36VDC to -72VDC
- Power and cooling unit output voltages
  - +5VDC
  - +12VDC

## Environmental Specifications

Feature	Specifications
Temperature	
Operating	5° to 40°C (41° to 104°F)
Nonoperating	-40° to 65°C (-40° to 149°F)
Stock (nonoperating)	55°C, 80% RH @ 5 hours -10°C @ 10 hours, 20°C 10% RH @ 5 hours
Cold Starts (operating)	5 times powered on at 5°C
Humidity	
Operating	10% to 90% relative to 27°C max. wet bulb, noncondensing
Nonoperating	93% relative to 38°C max. wet bulb, noncondensing



Feature	Specifications
Altitude	
Operating	-30 m to 3,048 m (-100 to 10,000 ft.)
Nonoperating	-30 m to 12,192 m (-100 to 40,000 ft.)
Acoustical Noise	64dBA

## Compliance

Standard	Specifications
Safety	
IEC 60950 (C22.2-60950) (EN60950) (UL60950)	CUL Notice of Authorization
EMC and Safety	Telcordia GR-1089-CORE test report
Emissions and Immunities	
RF Radiated Emissions	CISPR22 (EN55022), Class B – European Union FCC Part 15, Class B – USA, Industry of Canada
Conducted Emissions	CISPR22 (EN55022), Class B – European Union FCC Part 15, Class B – USA, Industry of Canada
Harmonic Emissions	IEC 61000-3-2:2000 (No Limits) – European Union
Voltage Flicker	IEC 61000-3-3:1995/A1:2001 (No Limits)
ESD Immunity	CISPR 24 (EN55024; 8kV Contact, 15kV Air) IEC 61000-4-2
RF Field Immunity	CISPR 24 (EN55024, 10V/m) IEC 61000-4-3
Electrical Fast Transient/Burst Immunity	CISPR 24 (EN55024; 1kV I/O, 2kV Power) IEC 61000-4-5
Surge Immunity	CISPR 24 (EN55024; 1kV I/O, 1kV Power L-L, 2kV Power L-G) IEC 61000-4-5
RF Conducted Immunity	CISPR 24 (EN55024; 3V I/O and Power) IEC 61000-4-6
Power Frequency Magnetic Field Immunity	CISPR 24 (EN55024) IEC 61000-4-8
Voltage Dip and Interruption	CISPR 24 (EN55024; 0v/0.5 cycle, 70%V/0.5 sec., 0V/5 sec.)
Voltage Dips/Short Interruptions/Voltage Variation Immunity	IEC 61000-4-11
NEBS Compliance (Environmental and Physical)	Telcordia GR-63-CORE, Certified Level 3 (No margin requirement) (Telco, -48VDC Only) GR-1089-CORE
ETSI (Environmental and Emissions)	EN 300 386
MIL-STD-810F	Method 500.4 Altitude Method 501.4 High Temperature Method 502.4 Low Temperature Method 507.4 Humidity Method 509.4 Salt Fog Method 514.5 Category 4 Transportation Vibration Method 514.5 Category 21 Watercraft Vehicle Method 516.5 Functional Shock (15G's operational) Method 516.5 Bench Handling
Acoustic Noise	ISO 7779:1988



Standard	Specifications
Environmental	
RoHS (Restriction of Hazardous Substances)	European Union (EU) Directive 2002/95/EC, invoking the “lead-in-solder” exemption, Article 4(1) paragraph 7.

## Product Safety by Country

Country	Standard
U.S.	UL Listed to UL60950:2000, 3rd Edition
Canada	CSA Standard CAN/CSA-C22.2 No. 60950-00 3rd Edition
Germany	TUV GS mark (ergonomics) (Rheinland)
European Union	EN60950:2000
Japan	Part of World-wide CB Scheme
Australia	Part of World-wide CB Scheme
China *	CCC mark
Russia *	Hygienic Mark (ergonomics)
Argentina	Resolution 92-98 (S-Mark)

## Electromagnetic Interference

Test	Standard
Harmonics Emissions	EN 61000-3-2:2000 (No Limits)
Voltage Flicker	EN 61000-3-3:1995/A1:2001 (No Limits)
ESD	EN 55024 (8kV Contact, 15kV Air)
RF Field	EN 55024 (10V/m)
Electrical Fast Transient Burst	EN 55024 (1kV I/O, 2kV Power)
Surge	EN 55024 (1kV I/O, 1kV Power L-L, 2kV Power L-G)
RF Conducted	EN 55024 (3V I/O and Power)
Power Frequency Magnetic Field	EN 55024 (N/A monitors only)
Voltage Dip and Interruption	EN 55024 (0v/0.5 cycle, 70%V/0.5 sec., 0V/5 sec.)

## Electromagnetic Compatibility by Country

Country	Standard
U.S.	FCC #47, Part 15, Subpart B, Class A (standalone minimum)
Canada	ICES-003
Japan	VCCI Class A



Country	Standard
European Union Germany	EN 55022:1998 Class A (standalone minimum)
Australia/New Zealand	AS/NZS 3548:1996
China	GB4943-1995, GB9254-1998, GB17625,1-1998 (CCC mark)
Taiwan	BSMI CNS 13438 Class A (standalone minimum)
Korea	MIC Korea
Russia	GOST-R mark
Argentina	S mark

# System Configuration and Management

## Configuration and Management Software

There are four ways to configure and manage a Sun StorEdge™ 3510 Fibre Channel array:

1. Terminal menu interface — This method allows the MOST control over the Sun StorEdge 3510 FC, since it "taps" directly into the array's RAID controller firmware.

Examples of the terminal menu interface are shown below.

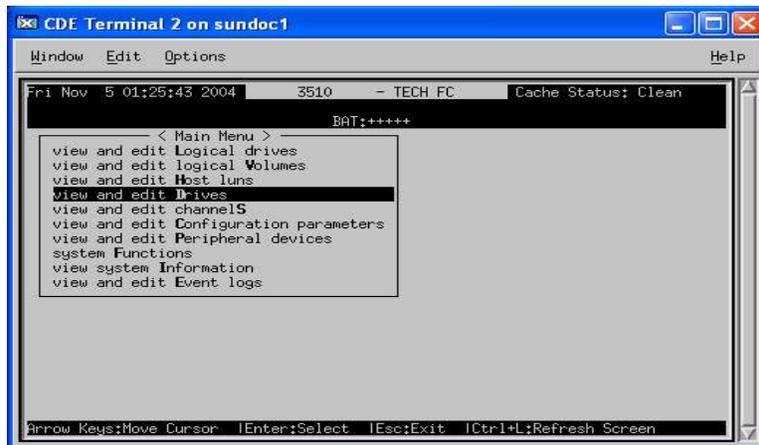


Figure 19. Terminal menu interface, main menu

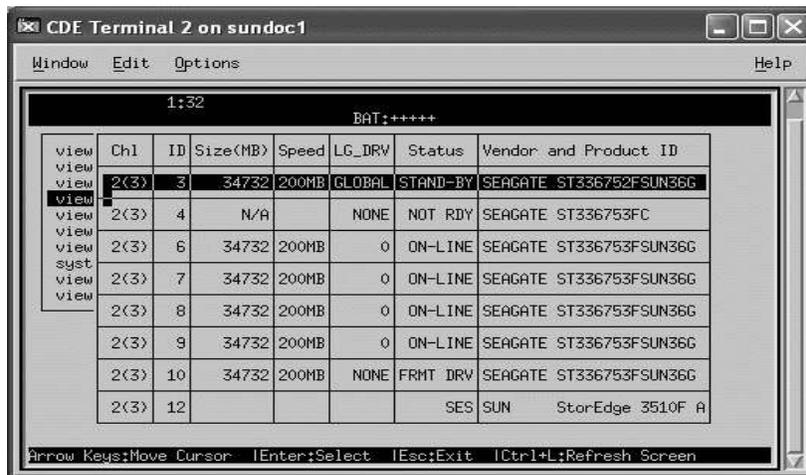


Figure 20. Terminal menu interface, drive status

Note: To configure an X86/Linux, HP-UX, or IBM AIX server, only method 1 (the terminal menu interface) is applicable.



## 2. Sun StorEdge Configuration Service (SSCS) Graphical User Interface

- A. This requires that an SSCS agent utility be loaded onto a Solaris™ Operating Environment server that is connected to a Sun StorEdge 3510 Fibre Channel array that is to be managed/monitored.
- B. An SSCS console utility must also be loaded onto a Solaris Operating Environment workstation.
- C. From an SSCS console, the user can manage an X number of SSCS agents/Sun StorEdge 3510 Fibre Channel arrays.
- D. SSCS can also be used to dynamically change RAID controller firmware (when there are dual redundant controllers installed).
- E. SSCS agent/console utilities for the Solaris Operating Environment are included in the Sun StorEdge 3510 FC software CD shipping package.
- F. More details on SSCS are found in the sections below.

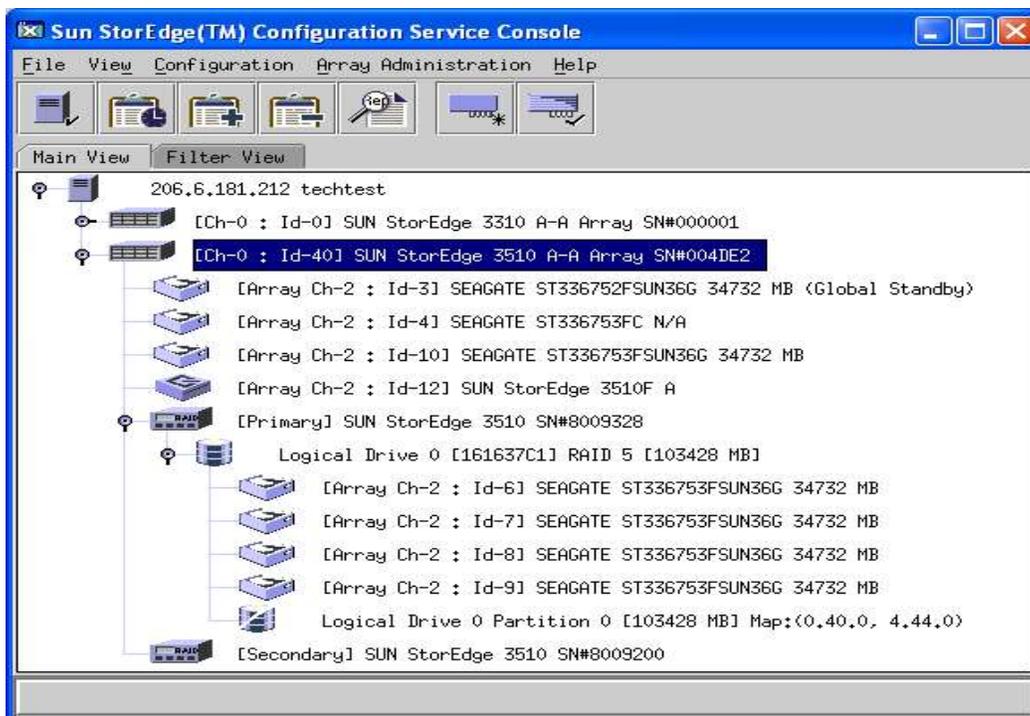


Figure 21. Sun StorEdge Configuration Service GUI



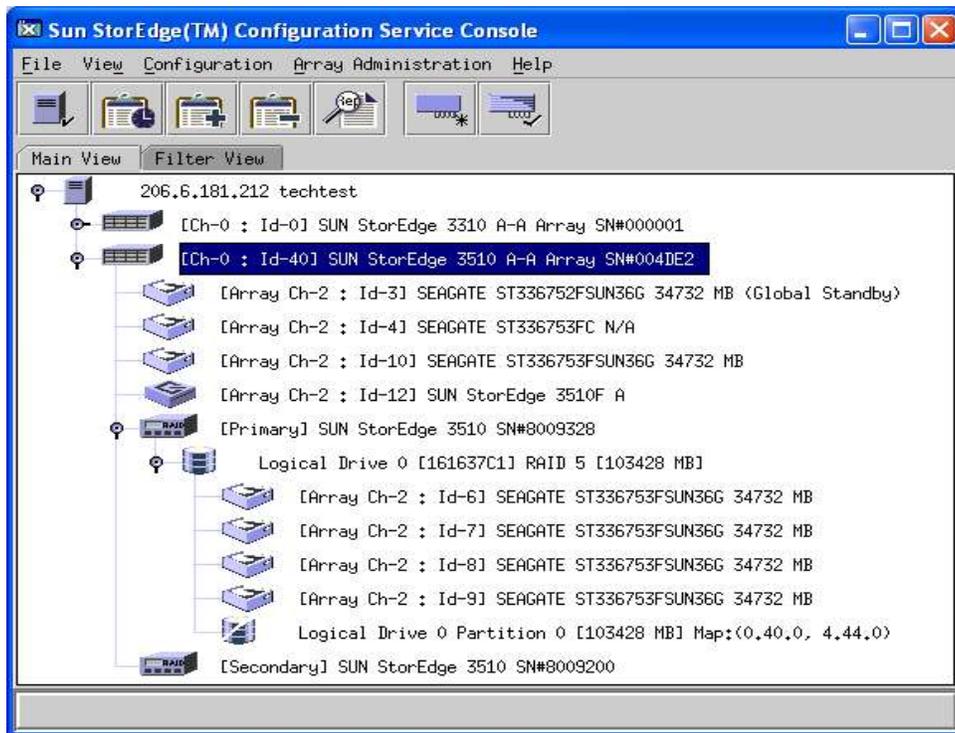


Figure 22. Sun StorEdge Configuration Service GUI

3. Web Browser — This method allows SSCS to be launched from a web browser (Netscape™ 4.7+). The functionality is the same as SSCS itself.

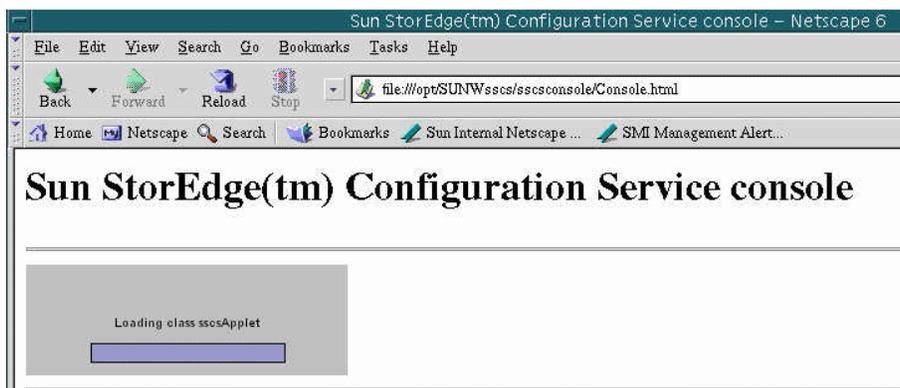


Figure 23. Sun StorEdge Configuration Service GUI, launched via web browser

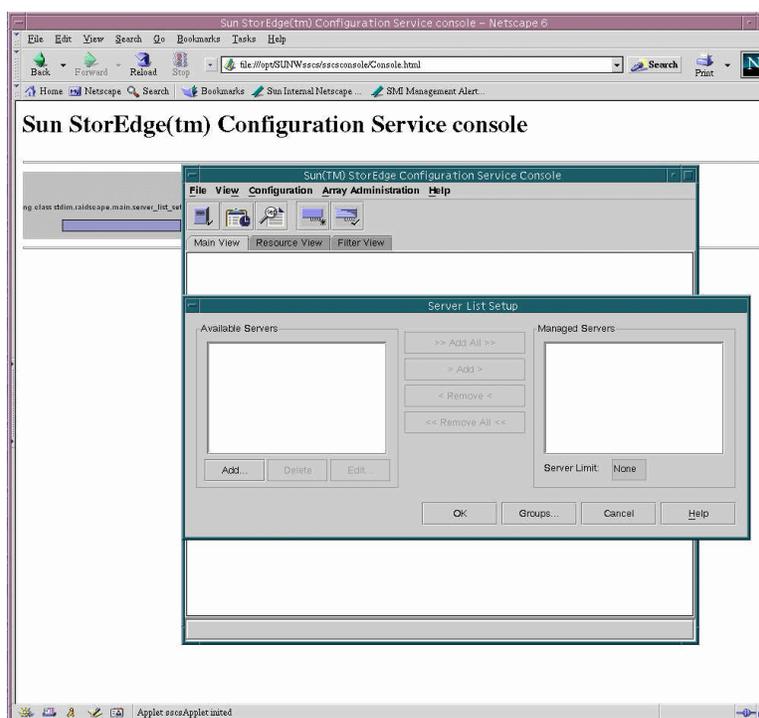


Figure 24. Sun StorEdge Configuration Service GUI, from web browser

---

Note 1: The three methods discussed above can be used when the array is attached to a Solaris Operating Environment or Microsoft Windows 2000/NT-based server only.

Note 2: To configure an X86/Linux, HP-UX, or IBM AIX server only method 1 (the terminal menu interface) is applicable.

---

4. Command Line Interface (CLI) – This method allows configuration of the Sun StorEdge 3510 array through traditional scripting methods.

## Sun StorEdge Configuration Service Software

Sun StorEdge Configuration Service (SSCS) software is a Java™ technology-based software program that combines storage configuration, maintenance, and monitoring tools into a single, easy-to-use application. SSCS software provides centralized administration of Sun StorEdge 3510 FC storage systems across existing local and wide area networks. This software helps simplify storage management and can reduce its administration costs.

The Sun StorEdge Configuration Service software graphical interface uses intuitive controls and graphics to present configuration options, maintenance features, and status information for storage systems and servers. A color-coded design provides feedback and clear status information for each component. Critical conditions that require immediate attention are always easily identified and simple to locate. Configuration features and controls are well marked and operate smoothly. SSCS software is very easy to learn through its use of familiar interface elements.

Sun StorEdge Configuration Service software provides complete monitoring of Sun StorEdge 3510 RAID controllers, disk drives, etc. From a single Sun StorEdge Configuration Service console, system administrators can view and make changes to entire Sun StorEdge 3510 storage systems. In the event of a status change, Sun StorEdge Diagnostic Reporter software sends real-time, proactive alerts to the system administrator via its console display, e-mail, or through an alphanumeric pager, allowing users to monitor the system remotely.

Storage setup and management is easy with Sun StorEdge Configuration Service software. Custom configuration options allow network administrators to configure storage volumes, RAID levels, cache modes, stripe sizes, and other storage parameters to meet particular server and application requirements.

Sun StorEdge Configuration Service also allows dynamic array firmware upgrades when there are dual redundant controllers configured. With SSCS software's ease of use and attention to detail, even ambitious storage installations are simple to manage.

Configuration services features include the following:

- GUI based management and monitoring
- Phone home alert support (email alerts)
  - Defines the types of message traps sent, the timing of messages sent, forward encrypted messages, and receive messages on the Diagnostic Reporter which functions as an email viewing program.
  - Operates in background mode continuously on the computer where it is installed and also has a controlling Sun StorEdge Configuration Service Agent (a controlling agent is the only agent which talks to a specific array).
  - Enhanced battery expiration and hardware status reporting.

## Sun StorEdge Traffic Manager Alternate Pathing Software

To help maximize data accessibility and path redundancy, Sun recommends that customers implement Sun StorEdge Traffic Manager software. This software is independent of Sun StorEdge Configuration Service software and provides a path failover mechanism in the event of HBA, switch, or cable failure.

On the Sun StorEdge 3510 Fibre Channel array, Sun StorEdge Traffic Manager software supports the following operating systems:



- Solaris 8,9 and 10 Operating Environment
- HP-UX 11.0 and 11i
- IBM AIX 4.3.3 and 5.1L (32 and 64 bit)
- Microsoft Windows NT and 2000

Sun StorEdge Traffic Manager software for the Solaris 8 and 9 Operating Environments is included with each UltraSPARC™ III server from Sun at no additional charge. For more information on the use of Sun StorEdge Traffic Manager software in operating environments other than the Solaris Operating Environment, refer to [http://www.sun.com/storage/san/multiplatform\\_support.html](http://www.sun.com/storage/san/multiplatform_support.html).

Sun StorEdge Traffic Manager for Microsoft Windows, IBM AIX, and HP-UX is available to purchase from Sun Microsystems and its authorized resellers.

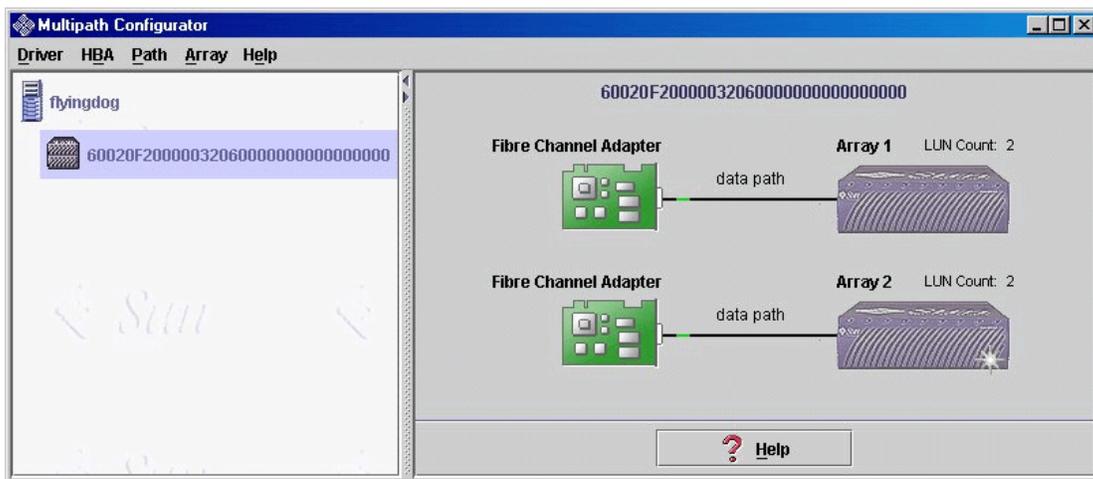


Figure 25. Sun StorEdge Traffic Manager Main Screen

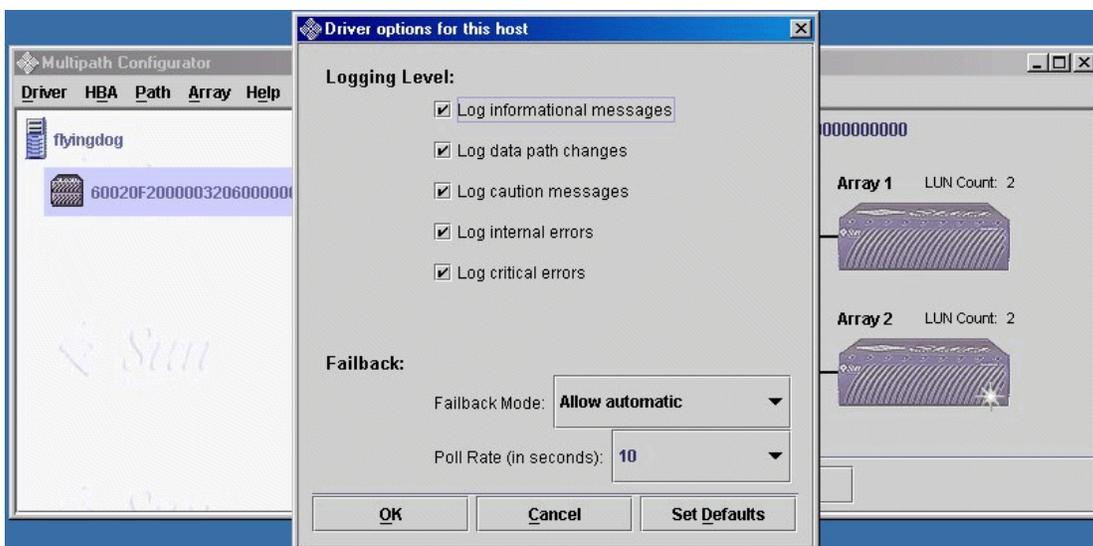


Figure 26. Driver options screen





Figure 27. HBA properties screen

## Sun SAN Support

The Sun StorEdge 3510 Fibre Channel array is fully supported under Sun's SAN 4.2 release. Refer to the SAN 4.2.4.3/4.4 WWW (SunWIN token number 397802) for a complete list of supported switches and other interconnects and the SAN 4.2./4.3/4.4 Just the Facts (SunWIN token number 345251) for supplementary information. This matrix is also located at the following URL: <http://webhome.sfbay/networkstorage/sales/matrix.html>.

# Ordering Information

## Shipping Configurations

The shipping configurations for the Sun StorEdge™ 3510 Fibre Channel array are shown below.

Note: For all configurations, AC power cord country kits are ordered separately. DC power configurations include two -48 volt DC power cords.

### JBOD Expansion Unit Base Configuration

The Sun StorEdge 3510 Fibre Channel array JBOD expansion unit base configuration ships with the following accessories:

- Two short-wave SFPs
- One 12-inch Fibre Channel Expansion Cable (RAID controller to JBOD Expansion)
- Two power cord lock kits

### Single RAID Controller Base Configuration

The Sun StorEdge 3510 Fibre Channel array single RAID controller base configuration ships with:

- Four short-wave SFPs
- One 25-foot CAT 5 cable (for out-of-band management)
- One 25-foot serial null modem cable (for out-of-band management)
- One DB9 to DB25 adapter
- Two power cord lock kits

### Dual RAID Controller Base Configuration

The Sun StorEdge 3510 Fibre Channel array dual RAID controller base configuration ships with:

- Six short-wave SFPs
- One 25-foot CAT 5 cable (for out-of-band management)
- One 25-foot serial null modem cable (for out-of-band management)
- One DB9 to DB25 adapter
- Two power cord lock kits

Note: For single and dual controller base configurations (RoHS and non-RoHS compliant): The single CD containing Sun StorEdge Configuration Service Management and Diagnostic Reporter Software, installation and configuration documents, and SE3000 Family Documentation is NOT automatically included with the Sun StorEdge 3510 FC Array configurations. The contents of this CD are available via the Sun Download Center located at the following URL:

<http://www.sun.com/software/download/>

The CD is available by ordering the following no charge part number: NCSS9-200-W9NR (Sun StorEdge 3000 Family software and documentation 2.0 and 2.1)



## Ordering Notes


---

- Note 1: The single CD containing Sun StorEdge Configuration Service Management and Diagnostic Reporter Software, installation and configuration documents, and SE3000 Family Documentation is NOT automatically included with the Sun StorEdge 3510 FC Array configurations. The contents of this CD are available via the Sun Download Center located at the following URL:  
<http://www.sun.com/software/download/>
- Note 2: All configurations ship with dual redundant power supplies standard. Customers can order either AC or DC equipped versions.
- Note 3: All configurations ship with the nameplate "Sun StorEdge 3500" affixed on the front bezel.
- Note 4: All RAID controller versions ship with one serial cable and one Ethernet cable for management.  
All expansion versions ship with two Fibre Channel cables.  
RAID-equipped arrays DO NOT come with any Fibre Channel cables.  
Refer to "Cables" later in this section for a list of supported cables.
- Note 5: For five-drive configurations, the five corresponding drive carriers are included and installed with the drives in the array. The remaining seven empty drive bays do NOT come with empty drive carriers. Customers can purchase additional Sun StorEdge 3510 Fibre Channel array specific X-option drives, which do come with drive carriers.
- Note 6: The Sun StorEdge 3510 Fibre Channel array drive carriers are UNIQUE – Sun StorEdge T3, A5200, etc. drive carriers CANNOT be used in the Sun StorEdge 3510 Fibre Channel array.
- Note 7: All drive bays MUST be populated with either 1) a drive; or 2) an air management sled. This is critical to maintain proper air flow and cooling in the system.
- Note 8: All RAID controller configuration ship pre-configured with RAID level zero (0).
- Note 9: Rack-ready configurations do NOT come with any rackmount rail kits. Customers need to order one of the following, depending on their needs:
- Rack kit, 2U 19-inch cabinet 24 to 36-inch (part number XTA-3000-2URK-19U(Z))
  - Rack kit, 2U 19-inch cabinet Telco center mount (part number XTA-3000-2URK-19C(Z))
  - Rack kit, 2U 19-inch cabinet Telco front mount (part number XTA-3000-2URK-19F(Z))
- Note 10: All pricing for the Sun StorEdge 3510 Fibre Channel array is listed under discount Category P.
- 



**Part Number Scheme for the StorEdge 3000 Family products:**

**XTA3120R01A0R145Z**

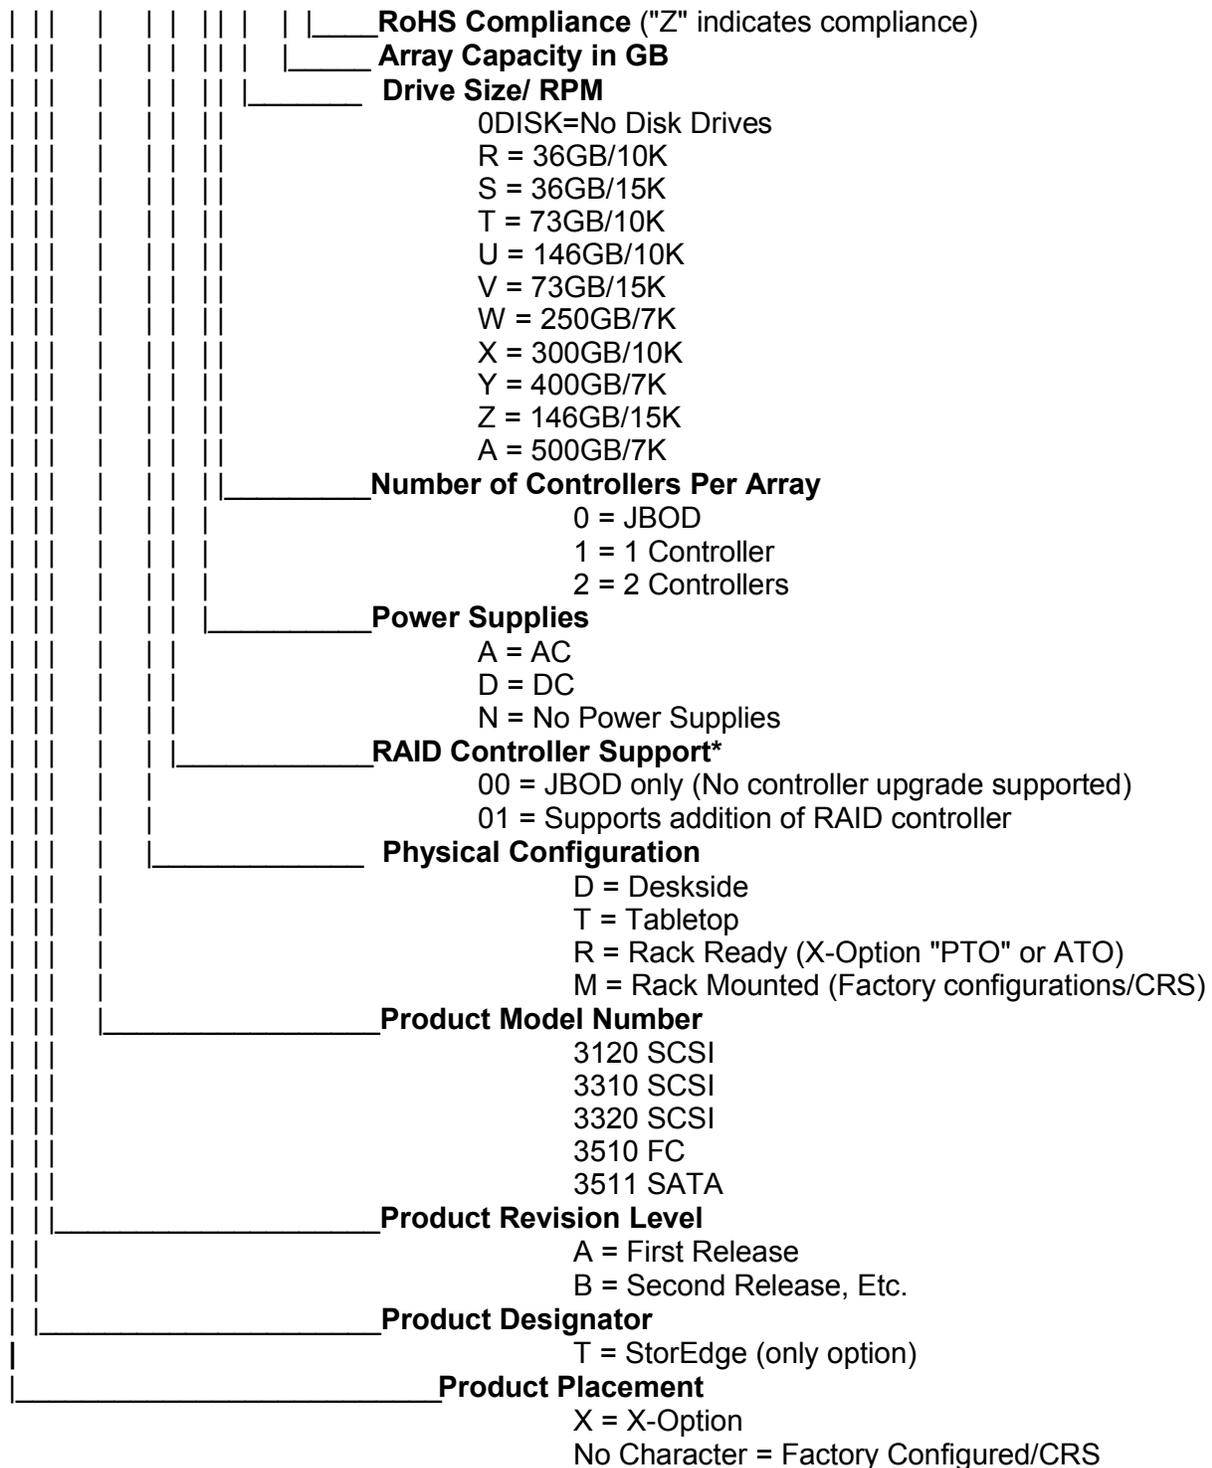

**\*Notes:**

- 1)The StorEdge 3310 does not follow the scheme above.
- 2)The StorEdge 3510 "Drive size/RPM" is inconsistent with the character "R" as defined above. For the 3510, the character "R" represents either 73/10Krpm or 146/10Krpm disk drives.



## RoHS Compliant 3510 Part Numbers

For a detailed listing of the RoHS compliant SE3510 fixed system configurations and options product codes, please refer to the Worldwide Configuration Guide at <http://mysales.central/public/configGuide/>

Once inside the Configuration Guide:

- 1) Select "Workgroup Storage"
- 2) Select one of the following associated links
  - Sun StorEdge 3510 Fixed System Configurations
  - Sun StorEdge 3510 Options

## Non-RoHS 3510 Part Numbers:

### RAID Controller Drive, AC Power Part Numbers

Part Number	Description
36-GB 15000-rpm Disk Configurations	
XTA3510R01A1S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A1S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12 x 36.4-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01A2S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache per controller, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A2S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12 x 36.4-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache per controller, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
73-GB 10000-rpm Disk Configurations	
XTA3510R01A1R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)



Part Number	Description
XTA3510R01A1R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01A2R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A2R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)

---

#### 73-GB 15000-rpm Disk Configurations

---

XTA3510R01A1V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A1V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01A2V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A2V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)

---

#### 146-GB 10000-rpm Disk Configurations

---

XTA3510R01A1R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A1R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12 x 146-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software



Part Number	Description
XTA3510R01A2R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A2R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12 x 146-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)

---

#### 300-GB 10000-rpm Disk Configurations

---

XTA3510R01A1X1500	Sun StorEdge 3510 Fibre Channel array, rack ready, 1500 GB (5 x 300-GB 10000-rpm disks) with one FC RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A1X3600	Sun StorEdge 3510 Fibre Channel array, rack ready, 3600 GB (12 x 300-GB 10000-rpm disks) with one FC RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01A2X1500	Sun StorEdge 3510 Fibre Channel array, rack ready, 1500 GB (5 x 300-GB 10000-rpm disks) with two FC RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)
XTA3510R01A2X3600	Sun StorEdge 3510 Fibre Channel array, rack ready, 3600 GB (12 x 300-GB 10000-rpm disks) with two FC RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software (Standard Configuration)



## Storage Expansion Units, AC Power Part Numbers

Part Number	Description
<b>36-GB 15000-rpm Disk Configurations</b>	
XTA3510R01A0S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies (Standard Configuration)
XTA3510R01A0S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12 x 36.4-GB 15000-rpm disks), 2-Gb Fibre Channel expansion drive array, 2 SFP's, and two AC power supplies
<b>73-GB 10000-rpm Disk Configurations</b>	
XTA3510R01A0R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies (Standard Configuration)
XTA3510R01A0R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies
<b>73-GB 15000-rpm Disk Configurations</b>	
XTA3510R01A0V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies (Standard Configuration)
XTA3510R01A0V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies
<b>146-GB 10000-rpm Disk Configurations</b>	
XTA3510R01A0R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies (Standard Configuration)
XTA3510R01A0R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12 x 146-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies
<b>300-GB 10000-rpm Disk Configurations</b>	
XTA3510R01A0X1500	Sun StorEdge 3510 Fibre Channel array, rack ready, 1500 GB (5 x 300-GB 10000-rpm disks), FC-JBOD, 2 SFP's, and two AC power supplies (Standard Configuration)
XTA3510R01A0X3600	Sun StorEdge 3510 Fibre Channel array, rack ready, 3600 GB (12 x 300-GB 10000-rpm disks), FC-JBOD, 2 SFP's, and two AC power supplies



## RAID Controller/Expansion Units, DC Power Part Numbers

Part Number	Description
<b>36-GB 15000-rpm Disk Configurations</b>	
XTA3510R01D1S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D1S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12 x 36.4-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache per controller, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12 x 36.4-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache per controller, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D0S182	Sun StorEdge 3510 Fibre Channel array, rack ready, 182 GB (5 x 36.4-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies
XTA3510R01D0S436	Sun StorEdge 3510 Fibre Channel array, rack ready, 436 GB (12x 36.4-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies
<b>73-GB 10000-rpm Disk Configurations</b>	
XTA3510R01D1R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D1R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software



Part Number	Description
XTA3510R01D2R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D0R365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies
XTA3510R01D0R876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies

---

#### 73-GB 15000-rpm Disk Configurations

---

XTA3510R01D1V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D1V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D0V365	Sun StorEdge 3510 Fibre Channel array, rack ready, 365 GB (5 x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies
XTA3510R01D0V876	Sun StorEdge 3510 Fibre Channel array, rack ready, 876 GB (12x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies

---

#### 146-GB 10000-rpm Disk Configurations

---



Part Number	Description
XTA3510R01D1R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D1R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12 x 146-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two DC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D2R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12 x 146-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two DC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
XTA3510R01D0R730	Sun StorEdge 3510 Fibre Channel array, rack ready, 730 GB (5 x 146-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies
XTA3510R01D0R1752	Sun StorEdge 3510 Fibre Channel array, rack ready, 1752 GB (12x 146-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two DC power supplies

Note: The 3510 is fully supported with DC power supplies. Customers can reconfigure their existing 300GB-based AC configurations by using The DC power supply x-option kit P/N XTA-3000-2UDC-KIT.



## Customer Ready Systems (CRS) Factory-Configured Part Numbers

Part Number	Description
<b>36-GB 15000-rpm Disk Configurations</b>	
TA3510M01A0S436	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 436 GB (12 x 36.4-GB 15000-rpm disks), FC-JBOD, 1-GB standard cache, two AC power supplies, 2 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A2S436	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 436 GB (12 x 36.4-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
<b>73-GB 10000-rpm Disk Configurations</b>	
TA3510M01A0R365	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (5 x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies
TA3510M01A0R876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (12 x 73-GB 10000-rpm disks), 2-Gb Fibre Channel expansion, 2 SFP's, and two AC power supplies, and Sun StorEdge Configuration Service software
TA3510M01A1R365	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (5 x 73-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A1R876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (12 x 73-GB 10000-rpm disks), one 2-Gb Fibre Channel hardware RAID controller, 2 SFP's, and two AC power supplies, and Sun StorEdge Configuration Service software
TA3510M01A2R876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 876 GB (12 x 73-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
<b>73-GB 15000-rpm Disk Configurations</b>	



Part Number	Description
TA3510M01A0V365	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (5 x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, two AC power supplies, 2 SFP's, and Sun StorEdge Configuration Service software.
TA3510M01A0V876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (12 x 73-GB 15000-rpm disks), 2-Gb Fibre Channel expansion, two AC power supplies, 2 SFP's, and Sun StorEdge Configuration Service software.
TA3510M01A1V365	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (5 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A1V876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 876 GB (12 x 73-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A2V365	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 365 GB (5 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A2V876	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 876 GB (12 x 73-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software

---

#### 146-GB 10000-rpm Disk Configurations

---

TA3510M01A0R1752	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 730 GB (12 x 146-GB 15000-rpm disks), FC-JBOD, 1-GB standard cache, two AC power supplies, 2 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A1R730	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 730 GB (5 x 146-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software



Part Number	Description
TA3510M01A1R1752	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 730 GB (12 x 146-GB 15000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, 4 SFP's, and Sun StorEdge Configuration Service software
TA3510M01A2R1752	Sun StorEdge 3510 Fibre Channel array, factory configured, rackmountable in a 72-inch Sun StorEdge cabinet (sold separately), includes 1752 GB (12 x 146-GB 15000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies, 6 SFP's, and Sun StorEdge Configuration Service software

---

#### 300-GB 10000-rpm Disk Configurations

---

TA3510M01A0X1500	Sun StorEdge 3510 Fibre Channel array, includes 1500 GB (5 x 300-GB 10000-rpm disks), FC-JBOD, and two AC power supplies.
TA3510M01A0X3600	Sun StorEdge 3510 Fibre Channel array, includes 3600 GB (12 x 300-GB 10000-rpm disks), FC-JBOD, and two AC power supplies.



TA3510M01A1X1500	Sun StorEdge 3510 Fibre Channel array, includes 1500 GB (5 x 300-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies, and Sun StorEdge Configuration Service software
TA3510M01A1X3600	Sun StorEdge 3510 Fibre Channel array, includes 3600 GB (12 x 300-GB 10000-rpm disks) with one 2-Gb Fibre Channel hardware RAID controller, 1-GB standard cache, two AC power supplies and Sun StorEdge Configuration Service software
TA3510M01A2X1500	Sun StorEdge 3510 Fibre Channel array, includes 1500GB (5 x 300-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies and Sun StorEdge Configuration Service software
TA3510M01A2X3600	Sun StorEdge 3510 Fibre Channel array, includes 3600 GB (12 x 300-GB 10000-rpm disks) with two 2-Gb Fibre Channel hardware RAID controllers, 1-GB standard cache, two AC power supplies and Sun StorEdge Configuration Service software

## Cables

Please refer to the 3510 FC-SATA WWWW matrix for detailed information on the latest qualified cables.

For the most current information, please refer to the “SAN 4.4.X and Solaris 10 WWWW”  
<http://sundoc.central/SunWinPublicView.jsp?token=397802>

## Detailed Information on Qualified Operating Systems Environments, HBA's, Servers, Cabling and Expansion Cabinet/Mounting Support

Please refer to the Sun StorEdge 3510 FC – What Works With What matrix for detailed information on the latest Operating Systems, HBA and drivers (Solaris and non-Solaris), peripherals, cables, expansion cabinet/racks and mounting option support. The 3510 WWWW can be found by selecting the Sun StorEdge 3510 FC Array matrix link at <http://webhome.ebay/networkstorage/sales/matrix.html>.



## WEBDESK Ordering Flow Chart

The following is a text representation of WEBDESK's GUI order flow for the Sun StorEdge 3510 Fibre Channel array.

### Section 1: Configure Primary Array (required)

#### STEP 1: Number of FC-AL RAID Controllers

Select 0 Expansion, 1, or 2.

#### STEP 2: Storage Location

Select Rack Ready or Table Top.

#### STEP 3: Power Type

Select AC or DC.

#### STEP 4: Disk Type

Select 36.4 GB 15k RPM Drive, 73GB 10k RPM Drive, 73GB 15k RPM Drive, or 146 GB 10k RPM Drive.

#### STEP 5: Number of Disks per Array (total capacity)

Select any value from 5 to 12. 5-bay and 12-bay configurations come with drives factory installed. Selecting values 6, 7, 8, 9, 10, or 11 yields extra drives shipped as X-options (field configurable).

#### STEP 6: Number of External FC I/O Connections

Select 1 or 2 for expansion, 1 to 4 for one RAID controller, or 1 to 8 for two RAID controllers. Each connection selected yields one FC cable. Cables are auto-inserted according to selected part number in Section 1, Step 7.

#### **STEP 7: Preferred Cable(s)**

Select one and only one of the selectable cable options found in Webdesk. Up to eight are auto-inserted by the configurator. (Quantity depends on selection in Section 1, Step 6).

## **Section 2: Expansion Array Options (optional)**

Note: The "Storage Location," "Power Type," and "Disk Type" for expansion arrays are identical to the RAID array configured. You select the number of disks, connection type, and cable type. See Steps 1-3.

### **STEP 1: Number of Disks per Expansion Array (total capacity)**

Select any value from 5 to 12. 5-bay and 12-bay configurations come with drives factory installed. Selecting values 6, 7, 8, 9, 10, or 11 yield extra drives shipped as X-options (field configurable).

### **STEP 2: Connect To**

If you selected "0 Expansion array" under Number FC-AL of RAID Controllers, the only selection available is "Existing Expansion Array (Daisy Chained)."

If you selected "1" or "2" under Number FC-AL of RAID Controllers, select "RAID array (Direct)" or "Existing Expansion Array (Daisy Chained)."

Note: Selecting "RAID array (Direct)" connects the expansion array directly to the RAID array, utilizing the on-board FC ports of this device. Selecting "Existing Expansion Array (Daisy Chained)" daisy-chains the expansion array to a device that has been connected directly to the RAID array. You may only select "Existing Expansion Array (Daisy Chained)" AFTER a direct connection to the RAID array has been configured.

### **STEP 3: Preferred Cable(s) for Expansion Array(s)**

Select one and only one of the selectable cables found in Webdesk. One cable is added for every "Existing Expansion Array (Daisy Chained)." One cable is added for every "RAID array (Direct)" when "1" RAID controller is selected. Two are added for every "RAID array (Direct)" when "2" RAID controllers are selected.

### **STEP 4: Add Expansion Arrays**

Press the "Add" button. This add SAN expansion array to the configuration. Currently, one expansion array may be added to a "0 Expansion array" configuration, and two may be added to a "1" or "2" RAID controller configuration.

Note: You may not change your selection in "Number of FC-AL RAID controllers" if expansion arrays exist in your configuration. You must delete all expansion arrays if you desire to modify this selection (See Step 5).

### **STEP 5: Delete Expansion Arrays**

If you make a mistake or simply wish to modify the configuration, select an expansion array from the "Configured Expansion Arrays" table and press the "Delete" button. This deletes the array from your configuration.

## **Section 3: Miscellaneous and Auto-inserted Options**

### **STEP 1: Rackmount Kit (rack-ready arrays only)**

Select any of the following.

No Rackmount kit

XTA-3000-2URK-19U(Z)      19-inch rackmount kit for 24 to 36-inch cabinets (use with Sun Rack 900)



XTA-3000-2URK-19C(Z)	19-inch rackmount kit for Telco cabinets, center mount
XTA-3000-2URK-19F(Z)	19-inch rackmount kit for Telco cabinets, front mount

Note: Rack rails are not included with any Sun StorEdge 3510 Ship Kit.

## STEP 2: SFPs

Short-wave SFPs are auto-inserted when required. Long-wave SFPs are optional items.

A minimum pre-set quantity of short-wave SFPs for JBOD expansion, single RAID and dual RAID configurations are automatically included via the WEBDESK configurator. The WEBDESK configurator will add additional SFPs as need to complete the requested configuration.

The pre-set quantity of SFPs are:

- JBOD expansion unit includes two short-wave SFPs
- Single RAID controller includes four short-wave SFPs
- Dual RAID controller includes six short-wave SFPs

## STEP 3: Power Cords

Two geo-specific power cords are added to each Sun StorEdge 3510 array configured.

X311L	Localized power cord kit, North American/Asian
X312L	Localized power cord kit, Continental European
X314L	Localized power cord kit, Swiss
X317L	Localized power cord kit, U.K.
X383L	Localized power cord kit, Danish
X384L	Localized power cord kit, Italian
X386L	Localized power cord kit, Australian

## STEP 4: Add Host Bus Adapter

When configuring a single server and Sun StorEdge 3510 Fibre Channel array, select a minimum of one (X)6768A for every two external FC connections required, or one (X)6767A per external FC connection required. If you do not add sufficient options to meet this requirement, WEBDESK auto-inserts the required number of (X)6767 as the default card.

When configuring "Standalone Storage," you have several choices:

1. Select "Add default HBAs." The configurator adds one X6767A for every external FC I/O connections required.
2. Select "Add custom HBAs." The configurator does not add any HBAs and you have the option of selecting any type and quantity of HBAs that you would like (this configuration is NOT validated).
3. Select "No HBAs Required." The configurator does not add any HBAs.

Note: Co-existence of a Sun StorEdge 3510 Fibre Channel array and any other storage device on the same host bus adapter is not allowed.



# Warranty, Service, and Support

## Warranty

The Sun StorEdge™ 3510 Fibre Channel array comes with a 2-year warranty: 1st year, second business day, on-site. 2nd year, 15-day parts exchange.

## Support Contracts

The SunSpectrum™ program is an innovative and flexible service offering that allows customers to choose the level of service best suited to their needs, ranging from mission-critical support for maximum solution availability to backup assistance for self-support customers. The SunSpectrum program provides a simple pricing structure in which a single fee covers support for an entire system, including related hardware and peripherals, the Solaris™ Operating Environment software, and telephone support for Sun™ software packages. The majority of Sun's customers today take advantage of the SunSpectrum program, underscoring the value that it represents. Customers should check with their local Sun Enterprise Services representatives for program and feature availability in their areas.

SunSpectrum program support contracts are available both during and after the warranty program. Customers may choose to uplift the service and support agreement to meet their business needs by purchasing a SunSpectrum contract.

The four levels of SunSpectrum support contracts are outlined below.

## SunSpectrum Program Support

Program	Description
Mission-Critical SunSpectrum Platinum™ Support	Designed to support client-server, mission critical solutions by focusing on failure prevention, rapid recovery and year round technical services planning. Support is provided 24 x 7.
Business-Critical SunSpectrum Gold™ Support	Includes a complete package of proactive and responsive services for customers who require maximum uptime for their strategic business-critical systems. Support is provided 24 x 7.
System Coverage SunSpectrum Silver™ Support	Combines the service expertise, responsive on-site support and technical support by telephone and SunSolve™ CD/on-line services. Support is provided 8 a.m. to 8 p.m. Mon. through Fri.
Self-Directed SunSpectrum Bronze™ Support	Provided for customers who rely primarily upon their own in-house service capabilities. Allows customers to deliver high quality service by giving them access to UNIX® expertise, Sun certified replacement parts, software releases and technical tools. Support is provided 8 a.m. to 5 p.m. Mon. through Fri.



## Sun StorEdge Array Installation Service (Optional)

This service includes site preparation review, installation planning, installation, configuration verification, and system turnover for one Sun StorEdge 3510 Fibre Channel array. The specific tasks and deliverables included in this service are:

- Site preparation review including environmental states
- On-site installation planning including schedule and resources
- Development of System Installation Specification including RAID characteristics and recommendations
- Verify supported configuration and customer sign-off to start installation
- Installation of array hardware and cabling
- Installation of array software and patches
- Configuration and customization of the array including RAID levels and logical volumes
- Verification of installation and array functionality
- System turnover

# Glossary

Bandwidth	A measure of the capacity of a communication channel, usually specified in MB/second.
Cache	Memory on the RAID controller card which permits intermediate storage of read and write data without physically reading/writing from/to the disk, which can increase overall performance under certain conditions.
CLI	Command line interface.
Device name	Software device address that identifies the controller/LUN, such as cXtYdZs0, where X is the host bus adapter, Y is the controller, and Z is the LUN. s0 slice number is used by the system, not by RAID Manager.
Disk array	Two or more drives configured as a drive group (see next).
Drive group	A physical set of drives configured as an array. Drive groups are defined during configuration.
Expansion drive array	An enclosure containing a group of drives, power supplies, cooling fans, I/O cards, and midplanes (no RAID controller/controllers); generally, an external drive array that is used to daisy-chain to an existing hardware-based RAID configuration.
Fast write	Allows disk write commands to be safely acknowledged to the host before the data is actually written to the disk media. This can be enabled/disabled through the storage management software.
Full-duplex	Data transmission in both directions at the same time. See also Half-duplex and Simplex.
Half-duplex	Refers to an interface, such as FC, that can transmit data in only one direction at a time. See also Full-duplex and Simplex.
Host bus adapter	A card that connects a peripheral device to the computer system's I/O bus.
Hot plug	The ability to remove, replace, or add a device while current I/O processes continue.
Hot-serviceable	The ability to remove, replace or add a device while power is still applied but all I/O processes are suspended.
Hot-spare or hot-sparing	A drive in an array that is held in reserve to replace any other drive that fails. After a reconstruction, the hot-spare drive is returned to the standby status.
Hot-swap or hot-swappable	A specific case of hot-plug which involves replacing a device with another of the same size, type, and layout, without any notification to the operating environment.
IOPS	Input/output operations per second. A measure of I/O performance, this is usually used to quote random I/O performance. See throughput.



LUN	Logical unit number. A LUN is a set of physical drives in a RAID configuration which are seen by the operating system as one virtual drive.
MTBF	Mean time between failures. A measure of reliability, this is the average expected time between failures of equipment, usually measured in operating hours.
MTBDL	Mean time between data loss. In a RAID system, this is the average expected time between two rapid disk failures that would cause irreparable data loss.
MTTR	Mean time to repair. A measure of availability, this is the average time the system is out of commission to complete a repair process.
Parity	Additional information stored along with the data that allows the controller to reconstruct lost data on RAID 3 or 5 LUNs if a single drive fails.
Reconstruction	Process used to restore a degraded RAID 1, 3, or 5 LUN to its original state after replacing a single failed drive.
RDAC	Redundant disk array controller. The RDAC driver is included in the RAID Manager software, and manages the rerouting of active I/O operations when a controller fails.
RAID	Redundant Array of Independent Disks. A RAID is a set of disk drives appearing as a single logical disk drive to a system host. Different RAID levels provide different capacity, performance, availability, and cost characteristics.
RAID controller drive array	An enclosure containing one or two RAID controllers, a group of drives, power supplies, cooling fans, I/O cards, and midplanes.
RAS	Reliability, availability, and serviceability. Features that enhance these attributes, including hot-pluggable capability and redundancy, are important for keeping mission-critical applications and data on-line.
RoHS	RoHS (Restriction of Hazardous Substances) Please refer to the RoHS FAQs section following this glossary for complete details.
SAF-TE	FC Accessed Fault-Tolerant Enclosures.
SCA	Single connector attachment. A FC disk connector technology co-invented by Sun Microsystems. The SCA provides all FC, power, and control signals in a single connector, and enables easy servicing and highly reliable, pluggable disk drives.
FC address	The octal representation of the unique address (0-7) assigned to a narrow device; or hex representation of the unique address (0-15) assigned to a wide FC device.
Simplex	Transmission in one preassigned direction only. See also Full-duplex and Half-duplex.



SNMP	Simple network management protocol. SNMP enables RAID events to be remotely monitored by designated network management stations.
Split channel	Inside the same drive array enclosure, when the drive channel is evenly divided into two separate channels; for example, when a 12-drive channel is cleaved into two independent channels
Striping	Spreading, or interleaving, logically contiguous blocks of data across multiple independent disk spindles. The amount of data written on each disk before moving to the next drive is the stripe width.
Throughput	A measure of sequential I/O performance, quoted in MB/sec. See IOPS.
Volume	In VERITAS Volume Manager software, a volume is a virtual disk partition into which a file system, DBMS, or other application can place data. A volume can physically be a single disk partition or multiple disk partitions on one or more physical disk drives. Applications that use volumes do not need to be aware of their underlying physical structure. The VERITAS Volume Manager software handles mapping of virtual partition addresses to physical addresses.
Warm plug	The ability to remove, replace or add a device while power is still applied but all I/O processes are suspended.
XOR	Exclusive OR. A binary mathematical operation performed on data to produce parity information. In RAID levels 3 and 5, parity is generated from the user data, stored, and used to regenerate lost data if a drive failure occurs.

## RoHS Notes and FAQ

---

**IMPORTANT NOTE:** Part numbers with a character "Z" appended to the suffix indicates the product is RoHS Compliant. Some RoHS Compliant X-options (e.g., power conversion kits and disk drives) may not have a character "Z" in the part number. In these cases RoHS Compliance will be highlighted in the product's long description.

**Sun StorEdge(TM) 3510 FC Array:**

Please take a few moments to review the following information re the RoHS (Restriction of Hazardous Substances) compliant Sun StorEdge(TM) 3510 FC Array and the transitioning non-RoHS compliant Sun StorEdge (TM) 3510 FC Array.

**KEY DATES:**

RoHS Compliant Sun StorEdge(TM) 3510 FC Array - RR Date: 3/31/06, Target GA Date: 7/1/06

Non-RoHS Compliant Sun StorEdge(TM) 3510 FC Array - Last Order Date (LOD): May 26, 2006; Last Ship Date (LSD): August 25, 2006

### RoHS FAQ

Q. What does "RoHS compliant" mean?

A. Compliant with the "restriction of hazardous substances" directives set forth by the European Union (EU) parliament.

Q. What substances are included in the RoHS directive?

A. The RoHS directive bans the sale of certain electronic equipment containing the following materials: Lead, Mercury, Hexavalent Chromium, Cadmium, PBB and PBDE brominated flame retardants

Q. Per the European Union (EU) parliament's directive and country

specific legislation based on the EU's directive, to what extent is the SE3510 FC Array RoHS compliant and what do the terms "RoHS-5" and "RoHS-6" mean?



- A. The RoHS compliant SE3510 FC Array meets the EU's requirements for reduction of five regulated substances to the appropriate maximum concentration values.

The term "RoHS-5", present in the new SE3510 FC Array product descriptions, identifies RoHS compliance is achieved, but utilizes the exemption that allows lead to be used in solder materials for certain products.

The term "RoHS-6", present in the new RoHS compliant SE3510 x-option disk drive product descriptions, identifies RoHS compliance is achieved meeting all the EU's requirements for reduction of the six regulated substances to the appropriate maximum concentration values.

- Q. What is the mandatory implementation date for being RoHS compliant?

- A. The implementation date, per the European Union (EU)parliament directive, is July 1, 2006.

- Q. Why did the SE3510 FC Array utilize the Lead in solder exemption?

- A. At this time, the only alternative to Lead in solder is to use Tin. It has been determined the use of Tin in solder causes the growth of "whiskers" that can be detrimental to the array's electronics.

- Q. Is there a price premium for the RoHS compliant version of the SE3510 FC Array?

- A. No. Pricing for the RoHS compliant SE3510 is identical to that of the non-RoHS offering. Note: The non-RoHS compliant SE3510 was reduced in price on February 7, 2006 to ensure that our flagship workgroup products are competitively priced in the marketplace.

- Q. What is the difference between the transitioning non-RoHS compliant

SE3510 part numbers and the new RoHS compliant SE3510 part numbers?

- A. The only difference is the new RoHS compliant SE3510 part numbers meet the European Union's (EU) RoHS directive and country specific legislation based on the EU's directive.

- Q. Are RoHS compliant 4Gb SFPs available for the SE3510 FC Array?



- A. Yes, the following RoHS compliant Small Form Pluggable shortwave Fibre Channel optical transceivers are available for use with the SE3510 as field installable x-options and factory configurable options, respectively.

XSFP-SW-4GB: Small Form Pluggable shortwave Fibre Channel optical transceiver capable of 4Gb, 2Gb, and 1Gb transfer rates. RoHS-5 compliant.

XSFP-SW-4GB-4PK: 4 pack of Small Form Pluggable shortwave Fibre Channel optical transceivers capable of 4Gb, 2Gb, and 1Gb transfer rates. RoHS-5 compliant.

SFP-SW-4GB: Small Form Pluggable shortwave Fibre Channel optical transceiver capable of 4Gb, 2Gb, and 1Gb transfer rates. ATO version. RoHS-5 compliant.

SFP-SW-4GB-4PK: 4 pack of Small Form Pluggable shortwave Fibre Channel optical transceivers capable of 4Gb, 2Gb, and 1Gb transfer rates. ATO version. RoHS-5 compliant.

- Q. Will customers continue to receive support on their transitioned non-RoHS compliant product configurations after the Last Ship Date?
- A. Sun will continue to support the non-RoHS compliant configurations of the Sun StorEdge 3510 Array as long as the Sun StorEdge 3510 Array continues to be an active product.
- Q. Will Sun ship non-RoHS compliant products into EU countries with RoHS legislation after June 30, 2006?
- A. Sun has implemented controls to manage the transition to RoHS compliant products with the goal of fulfilling orders in compliance with the European Union's RoHS Directive. Sun will review orders for fulfillment with a destination of any EU Member State after June 30, 2006, and as a result of such review, may order a stop ship of any non-RoHS compliant product destined for shipment into the EU after that date.

For more information, please refer to the February 21, 2006 announcement cited below:



Sun Product Intro(Q2FY2006-290I): Announcing RoHS Compliant Sun StorEdge(TM) 3510 FC Array and Transitioning Non-RoHS Compliant Sun StorEdge(TM) 3510 FC Array - for RoHS Compliance  
SunWIN token# 466039.



# Materials Abstract

All materials are available on SunWIN, except where noted otherwise.

Collateral	Description	Purpose	Distribution	Token #
Product Literature				
– Sun StorEdge™ 3510 Fibre Channel Arrays, Just the Facts	Reference Guide (this document)	Sales Tool	SunWIN, Reseller Web	362837
– Sun StorEdge 3510 Fibre Channel Array Customer Presentation	Customer Presentation and Slide Notes	Sales Tool	SunWIN, Reseller Web	362838
– Sun StorEdge 3510 Fibre Channel Array Data Sheet	Two-page Color Data Sheet	Sales Tool	SunWIN, Reseller Web	362835
– Sun StorEdge 3500 Array Pocket Facts	Quick Reference Card	Sales Tool	SunWIN, First Resort, Reseller Web	362836
– Sun StorEdge 3500 Technical Customer Presentation	3510 and 3511 Technical customer Presentation and Slide Notes	Sales Tool	SunWIN, First Resort, Reseller Web	368604
– Sun StorEdge 3500 Best Practices Guide	3510 and 3511 Best Practices information on configuration and setup	Sales Tool	SunWIN, First Resort, Reseller Web	816-7325-16 Public Document
– Sun StorEdge 3510 Beat Sheets	3510 Competitive Information	Sales Tool	SunWIN, First Resort, Reseller Web	368606
– Sun StorEdge 3500 Technical Overview Paper	3510 and 3511 Technical differences	Sales Tool	SunWIN, First Resort, Reseller Web	407095
External Web Sites				
– Sun StorEdge Array Information Site	<a href="http://www.sun.com/storage/">http://www.sun.com/storage/</a>			
– Additional Information	<a href="http://www.sun.com/products_n_solutions/hardware/docs">http://www.sun.com/products_n_solutions/hardware/docs</a>			
– Upgrades Information	<a href="http://www.sun.com/ibb">http://www.sun.com/ibb</a>			

Internal Web Sites	
– Sun StorEdge 3510 FC Array WWW	<a href="http://webhome.ebay/networkstorage/sales/matrix.html">http://webhome.ebay/networkstorage/sales/matrix.html</a>
– One Stop for the 3510 FC Array	<a href="http://onestop/storage/3510.shtml?menu">http://onestop/storage/3510.shtml?menu</a>
– SSA Sun Center – SE Handbook	<a href="http://xmen.east/">http://xmen.east/</a>

