
56K* USB MODEM WITH VOICE*

The USR® 56K* USB Modem, now with voice[‡], delivers the performance and reliability USR is known for, in a compact, flexible form factor. This controller-based modem integrates powerful communications processing functions into the modem itself, for assured performance without sapping your computer's processing power. It is also broadly compatible across major operating systems including Linux, Windows and Macintosh. V.22 Fast Connect, which reduces the connection sequence time for very small data transfers, makes this modem ideal for Point of Sale (POS) systems. The USB modem also supports USR Modem on Hold application to screen incoming voice calls while online, and to answer calls without losing your internet connection - no second phone line is needed!







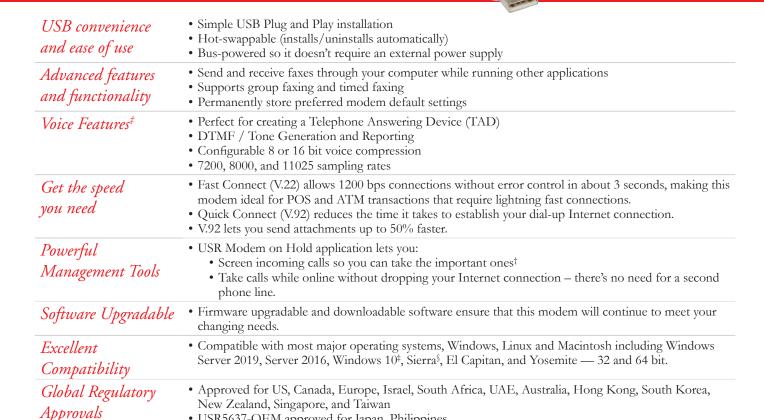





• USR5637-OEM approved for Japan, Philippines




Qualified for additional worldwide regulatory approvals, license fee for full approval





USRobotics



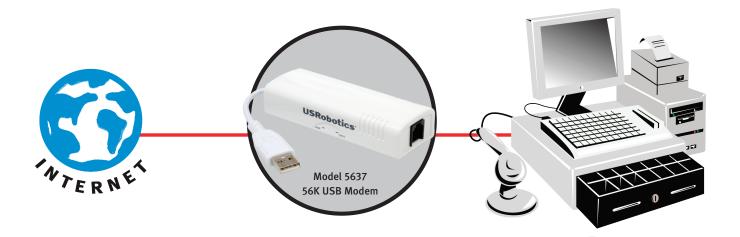

MODEL 5637 56K* USB MODEM



Specifications & Standards

GENERAL

- Data: V.92, V.90, V.34, V.32bis, V.32, V.22bis, V.22, V.23, and V.21
- Data Error Control/Compression: V.44/V.42/V42bis and MNP2-4/5
- Fax: EIA 578 (Class 1) with V.17, V.29, V.27ter, Group 3
- ITU-T V.253 Command Set
- V.80 video conferencing support
- DTE interface: USB Version 2.0
- USB powered
 - Typical current from USB supply = 240 mA (1.2W)
 - Maximum current from USB supply = 360 mA (1.8W)
- Caller ID and distinctive ring (require service from your local phone company/Caller ID may not be supported in some countries)
- · Hayes Compatible

PHYSICAL

- 2 LEDs: Power, Data
- Phone line interface: One RJ-11 socket

Environmental

- Temperature:
 - Operating Temperature conditions: 0 to 50 degrees C
 - Non-Operating Temperature conditions: -20 to 70 degrees C
- Humidity: Operating Humidity conditions:
 - 20% to 80% non-condensing
 - Non-Operating Humidity conditions: 5% to 95% non-condensing

REGULATORY

- FCC approved
- IC approved
- UL/CUL listed
- TBR-21

PACKAGE DIMENSIONS/WEIGHT

- 7.88 x 6 x 1.38 in (19.7 x 15.3 x 3.5 cm)
- .5 lb / .23 kg
- * Capable of receiving at up to 56 Kbps and sending at up to 48 Kbps (or 31.2 Kbps with V.90 server). Due to FCC regulations on power output, receiving speeds are limited to 53.3 Kbps. Actual speeds may vary. V.92 and V.90 features require compatible phone service and support from your Internet Service Provider (ISP). USR moderns featuring V.92 enhancements are backward compatible and will negotiate the highest possible speed when connecting to an ISP.
- † Call Waiting service required for using USR Modem on Hold application and Modem on Hold. Call Waiting/Caller ID service required for utilizing Caller ID capability
- ‡ Voice features require voice firmware available on www.usr.com/support/5637. Voice messaging requires additional third party software. Software included with the product enables data/fax support only. Voice features are available on Windows 10 after installing the Cumulative Update for Windows 10 Version 1607 (KB3206632).

 § Fax features no longer supported in maxOS Sierra Version 10.12.





- 3.88 x 1.5 x .88 in (9.86 x 3.81 x 2.24cm)
- 0.26 lb (0.12 kg)

Language Support

- Retail box: English, French, German, Greek, Italian, Spanish
- Installation guide: English, French, German, Greek, Italian, Spanish
- CD ROM User Guide: English, French, German, Greek, Italian, Spanish

MINIMUM SYSTEM REQUIREMENTS

- Windows® Server 2019/Server 2016/Server 2012 R2/Win 10[‡]/Win 10[‡] 64 bit/Server 2012/Win 8/Server 2011/Win 7/Server 2008/ Vista™/Server 2003/XP/2000, Mac 10.4-10.12[§], and Linux 2.4.20 kernel or higher (Unimodem TSP/TAPI compliant)
- Intel Pentium III 600 MHz or equivalent, 128 MB RAM, 5 MB hard drive space
- USB port
- 2x or better CD-ROM drive
- · Analog phone line

PACKAGE CONTENTS

- USR® 56K* USB Modem
- RJ11 Phone cord
- Quick Installation Guide
- Installation Essentials CD-ROM: drivers for Windows/Macintosh/ Linux, user's guide, data/fax software (Windows only), and USR Modem on Hold application (software requires Windows 2000 or higher)

Warranty

• 2-year limited manufacturer warranty from date of purchase

For connection to the Public Switched Telephone Network (PSTN)







